

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

额定电流: 1 AMP

Raring Current:1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 M Ω MIN.


Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.



温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40° C to+105° C



A03XX-11 XX XX X A XXX X 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	2'40P	G0=0.8u"	L0=0.8u"	1: PBT		A: PE Bag
17: 1.7mm		G1=1u"	L1=1U"	2: PA66		B: Tape & Reel
20: 2.0mm		G2=1.5u"	L2=1.5U"	3: PA66		C: Tube
25: 2.54mm		G3=2u"	L3=2U"	4: PA6T		D: Tube+CAP
30: 3.0mm		G4=3u"	L4=3U"	5: PA9T		E: Tray
		G5=5u"	L5=5U"	6: LCP		
		G6=10u"	L6=10U"	7:		
		G7=15u"	L7=15U"			
		G8=20u"	L8=20U"			
		G9=30u"	L9=30U"			
		T1=Ordinary Tin Plated				
		T2=Matte Tin Plated				
		T3=Tin-plated High-temperature				
		T4=high temperature Matt tin				

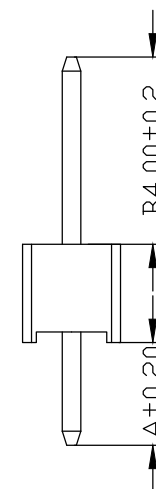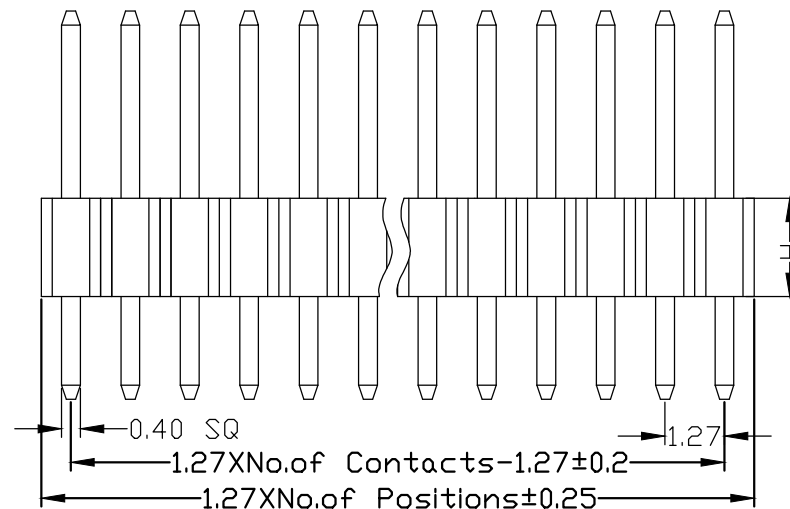

					OPERATION		SCALE		Fit		JIANGJI® 苏州江基电子科技有限公司 SuZhou JiangJi Electronic Technology CO.LTD			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN			PART NO.	A03XX-11XXXXXAXXXX1	
					X.XXX	±0.10								
					Angle	±3°	SHEET	1/1	CHECK			TITLE:	1.27mm 排针 单排 180度 1*XXP	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE			Customer No.	