

# Specifications

## 备注(Remark)

### 1. 材料(MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA9T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

### 2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C



Temperature Range: -40°C to +105°C

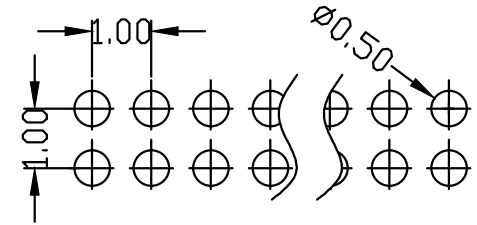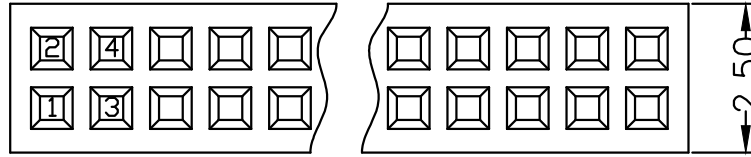

## Ordering Information

B0221-12 XX XX X AU X 1

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
2~50P	Full Of Gold	1: PBT	A: PE Bag
	LO=0.8u"	2: PA46	B: Tape & Reel
	L1=1u"	3: PA66	C: Tube
	G2=1.5u"	4: PA6T	D: Tube+CAP
	G3=2u"	5: PA9T	E: Tray
	L2=1.5U"	6: LCP	
	L3=2U"	7:	
	L4=3U"		
	L5=5U"		
	L6=10U"		
	L7=15U"		
	L8=20U"		
	L9=30U"		
	T1=Ordinary Tin Plated		
	T2=Matte Tin Plated		
	T3=Tin-plated High-temperature		
	T4=high temperature Matt tin		

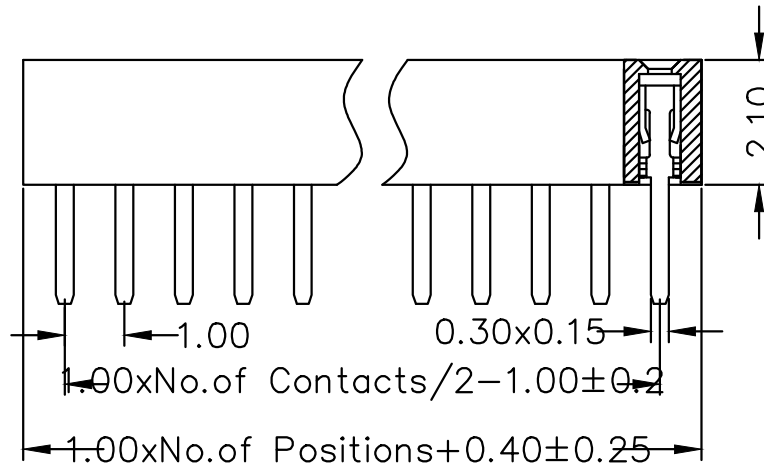

### OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

### SCALE

UNIT

SIZE

SHEET

PROJ.

### Fit

MM

A4

1/1

DESIGN

CHECK

APPROVE

**JIANGJI** 苏州江基电子科技有限公司  
SuZhou JiangJi Electronic Technology CO. LTD

PART NO.

B0221-12XXXXXAUX1

TITLE:

1.0排母 塑高2.1 2\*XXP 双排 180度 U型

Customer No.

REV DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

DIM TOL

PROJ.

DESIGN

CHECK

APPROVE

Customer No.