

# Specifications

## 备注(Remark)

### 1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

### 2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperature Range: -40°C to+105°C

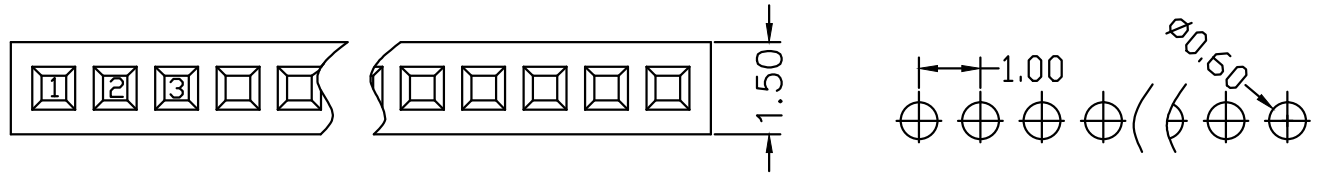

## Ordering Information

B0221-11 XX XX X AU X 1

NO. OF PINS PER ROW	Contact Plating		INSULATOR	PACKING
2~50P	Full Of Gold	Semi-gold	MATERIAL:	A:PE Bag
	G0=0.8u"	L0=0.8U"	1:PBT	B:Tape & Reel
	G1=1u"	L1=1U"	2:PA46	C:Tube
	G2=1.5u"	L2=1.5U"	3:PA66	D:Tube+CAP
	G3=2u"	L3=2U"	4:PA6T	E:Tray
	G4=3u"	L4=3U"	5:PA9T	
	G5=5u"	L5=5U"	6:LCP	
	G6=10u"	L6=10U"	7:	
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high temperture Matt tin			

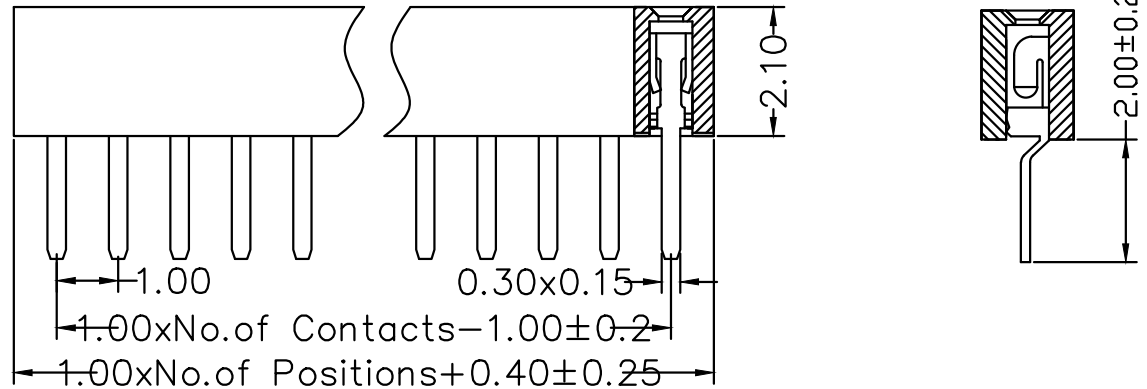

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		<b>JIANGJI</b> ® 苏州江基电子科技有限公司 SuZhou JiangJi Electronic Technology CO. LTD	
						X.X	±0.25	UNIT	MM				
						X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	B0221-11XXXXAUX1
						X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.00mm 单排母 塑高2.1 180度 U型
						Angle	±3°	PROJ.	☯	APPROVE		Customer No.	