

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40° C to +105° C



Temperture Range: -40° C to +105° C

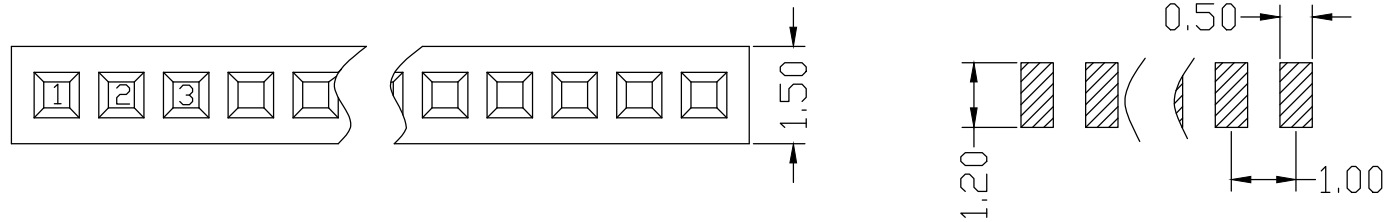

Ordering Information

B0221-11 XX XX X DU X 1

| NO. OF PINS PER ROW | Contact Plating | | INSULATOR MATERIAL: | PACKING |
|---------------------|--------------------------------|-----------|---------------------|----------------|
| 2~50P | Full Of Gold | Semi-gold | 1: PBT | A: PE Bag |
| | G0=0.8u" | L0=0.8u" | 2: PA46 | B: Tape & Reel |
| | G1=1u" | L1=1u" | 3: PA66 | C: Tube |
| | G2=1.5u" | L2=1.5u" | 4: PA6T | D: Tube+CAP |
| | G3=2u" | L3=2u" | 5: PA9T | E: Tray |
| | G4=3u" | L4=3u" | 6: LCP | |
| | G5=5u" | L5=5u" | 7: | |
| | G6=10u" | L6=10u" | | |
| | G7=15u" | L7=15u" | | |
| | G8=20u" | L8=20u" | | |
| | G9=30u" | L9=30u" | | |
| | T1=Ordinary Tin Plated | | | |
| | T2=Matte Tin Plated | | | |
| | T3=Tin-plated High-temperature | | | |
| | T4=high temperture Matt tin | | | |

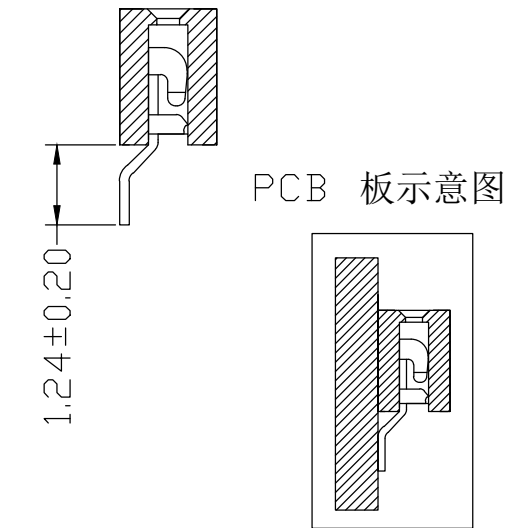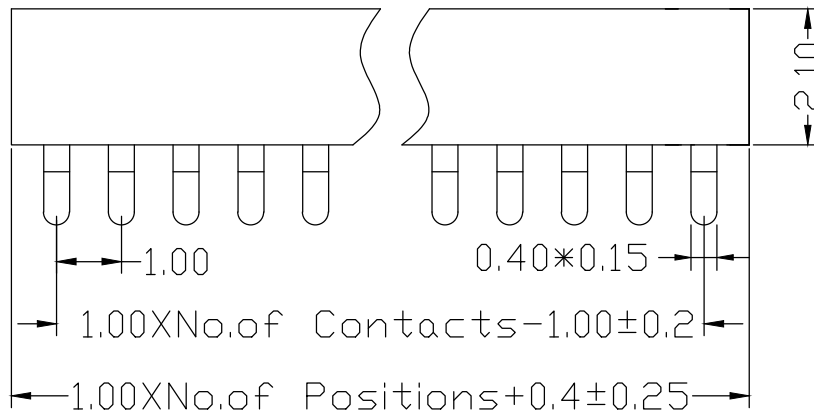

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | | SCALE | | Fit | | PART NO. | B0221-11XXXXXDUX1 |
|-----|------|--------------------------|--------|---------|-----------|-------|-------|-----|---------|--|--------------|---------------------------|
| | | | | | X.X | ±0.25 | UNIT | | MM | | | |
| | | | | | X.XX | ±0.20 | SIZE | A4 | DESIGN | | | |
| | | | | | X.XXX | ±0.10 | SHEET | 1/1 | CHECK | | TITLE: | 1.00mm 单排母 塑高2.1 卧式SMT U型 |
| | | | | | Angle | ±3° | PROJ. | ☉ | APPROVE | | Customer No. | |
| | | | | | DIM | TOL | | | | | | |

JIANGJI 苏州江基电子科技有限公司
SuZhou JiangJi Electronic Technology CO.LTD