
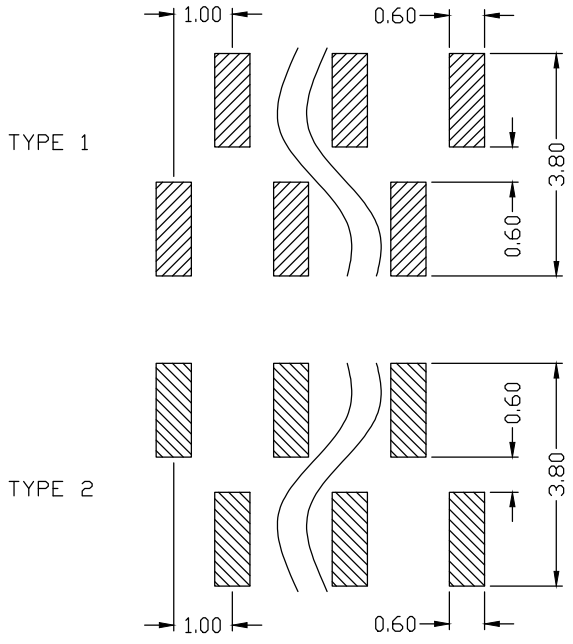




Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

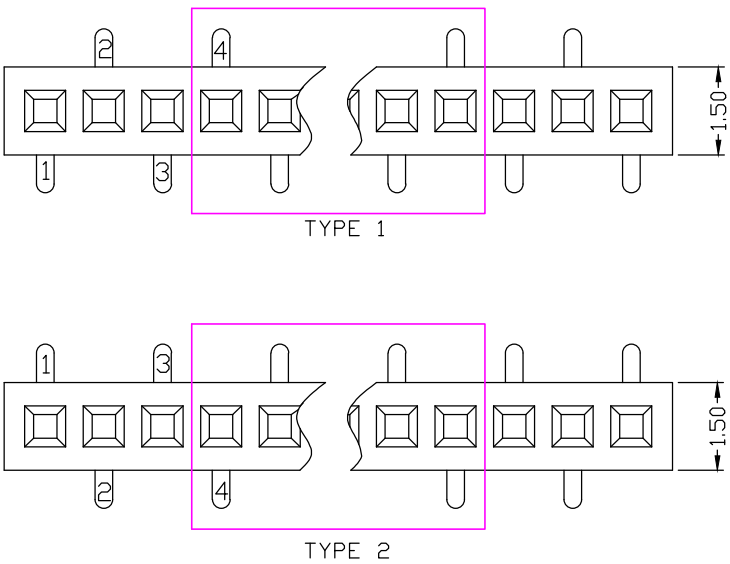

Ordering Information
B0221-11 XX XX X CU X X

NO. OF PINS	Contact Plating		INSULATOR	PACKING
PER ROW	Full Of Gold	Semi-gold	MATERIAL:	
2*50P	G0=0.8u"	L0=0.8U"	1:PBT	A:PE Bag
	G1=1u"	L1=1U"	2:PA46	B:Tape & Reel
	G2=1.5u"	L2=1.5U"	3:PA66	C:Tube
	G3=2u"	L3=2U"	4:PA6T	D:Tube+CAP
	G4=3u"	L4=3U"	5:PA9T	E:Tray
	G5=5u"	L5=5U"	6:LCP	
	G6=10u"	L6=10U"	7:	
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high temperture Matt tin			

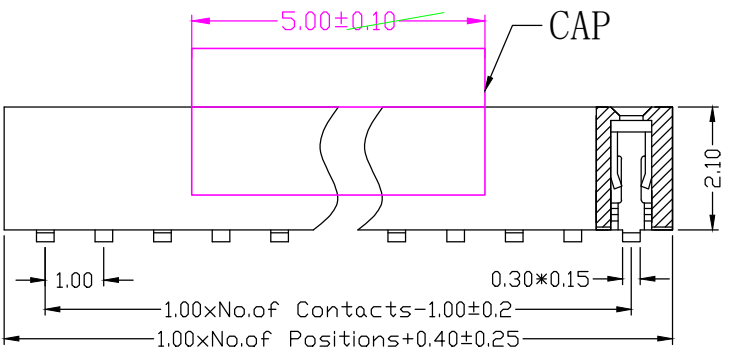

				OPERATION		SCALE		Fit	JIANGJI® 苏州江基电子科技有限公司 SuZhou Jiangji Electronic Technology CO. LTD			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	PART NO.		B0221-11XXXXXCUXX	
				X.XXX	±0.10	SHEET	1/1	CHECK	TITLE:		1.00mm 单排母 塑高2.1 SMT U型	
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	PROJ.	APPROVE	APPROVE	Customer No.			