

# Specifications






备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G, F UL94V-0, 颜色: 黑色.  
 Housing: PA6T+30%G, F UL94V-0, Color: Black  
 端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN  
 Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL  
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP  
 Raring Current: 1 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40° C to +105° C  
 Temperature Range: -40° C to +105° C

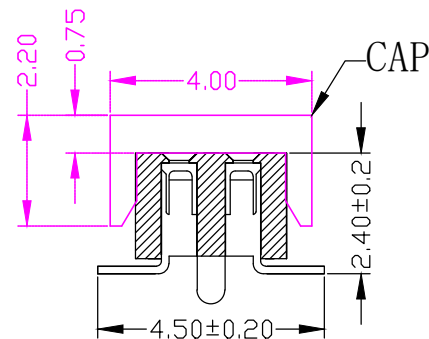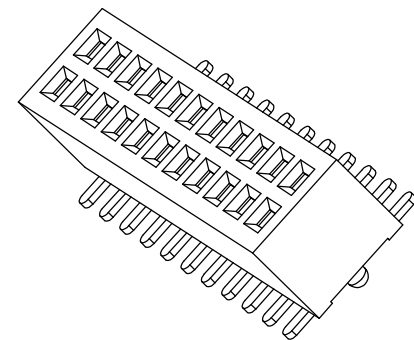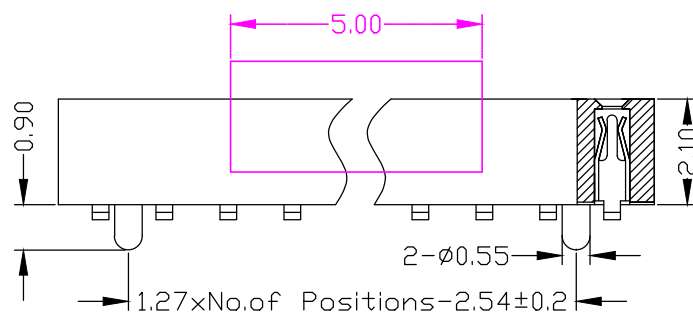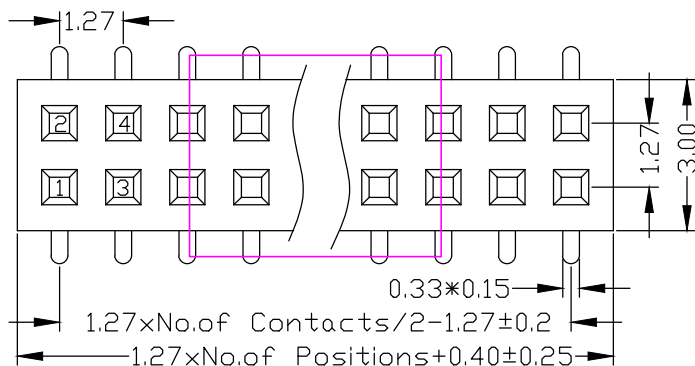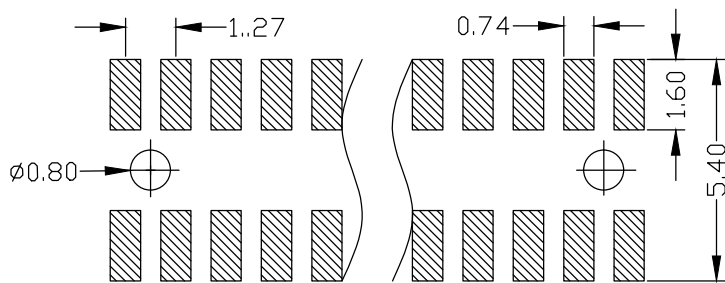

## Ordering Information

B0321-12 XX XX X CU X 2

NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	PACKING
2~50P	Full Of Gold	Semi-gold	1:PBT	A:PE Bag
	G0=0.8u"	L0=0.8U"	2:PA46	B:Tape & Reel
	G1=1u"	L1=1U"	3:PA66	C:Tube
	G2=1.5u"	L2=1.5U"	4:PA6T	D:Tube+CAP
	G3=2u"	L3=2U"	5:PA9T	E:Tray
	G4=3u"	L4=3U"	6:LCP	
	G5=5u"	L5=5U"	7:	
	G6=10u"	L6=10U"		
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high tempreture Matt tin			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		<b>JIANGJI</b> ® 苏州江基电子科技有限公司 SuZhou JiangJi Electronic Technology CO. LTD	
					X.X	±0.25	UNIT	MM				
					X.XX	±0.20	SIZE	A4	DESIGN		PARI NO.	B0321-12XXXXXCUX2
					X.XXX	±0.10	SHEET	1/2	CHECK		TITLE:	1.27mm 双排母 塑高2.1 SMT U型 带内柱
					Angle	±3°	PROJ.	⊕	APPROVE		Customer No.	
					DIM	TOL						