Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯：PA6T+30%G.F UL94V-0，颜色:黑色.

Housing:PA6T+30%G.F UL94V-0,Color:Black

端子：磷铜，镍底30u″MIN,表面镀金lu″MIN

Contact:Phosphor,lu″MIN GOLD PLATING OVER ALL
30u″ MIN NICKEL UNDERPLATING OVER ALL

2.特性（characteristics):

额定电流：1 AMP

Raring Current:1 AMP.

接触阻抗：20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗：1000 MΩ MIN.

Insulating Resistance:1000 MΩ MIN.

耐电压：AC 500V.

Withstanding Voltage:AC 500V.

温度范围：-40° C to+105° C

Temperture Range: -40° C to+105° C

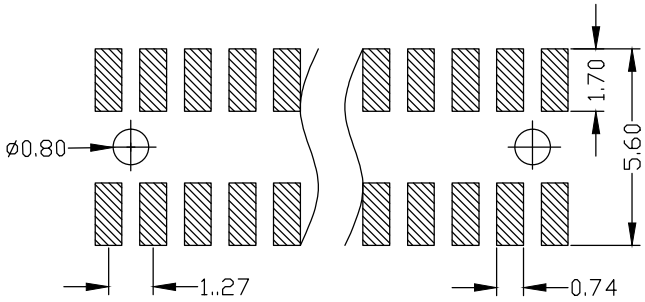

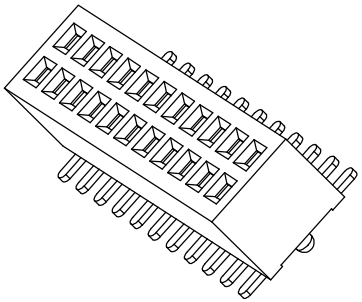

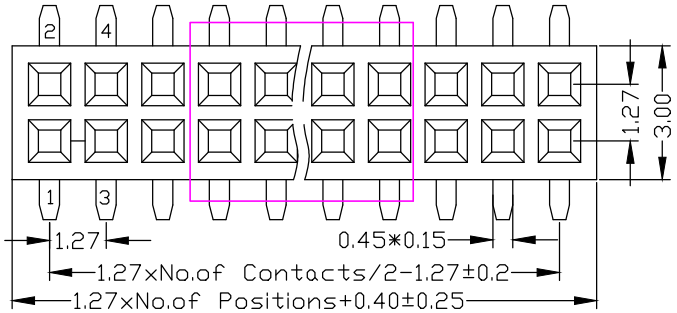

Ordering Information

B0334-12 XX XX X CU X 2

NO. OF PINS PER ROW
2~50P

Contact Plating

Full Of Gold	Semi-gold
G0=0.8u″	L0=0.8U″
G1=1u″	L1=1U″
G2=1.5u″	L2=1.5U″
G3=2u″	L3=2U″
G4=3u″	L4=3U″
G5=5u″	L5=5U″
G6=10u″	L6=10U″
G7=15u″	L7=15U″
G8=20u″	L8=20U″
G9=30u″	L9=30U″

T1=Ordinary Tin Plated
T2=Matte Tin Plated
T3=Tin-plated High-temperature
T4=high tempreture Matt tin

INSULATOR MATERIAL:
1:PBT
2:PA46
3:PA66
4:PA6T
5:PA9T
6:LCP
7:

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

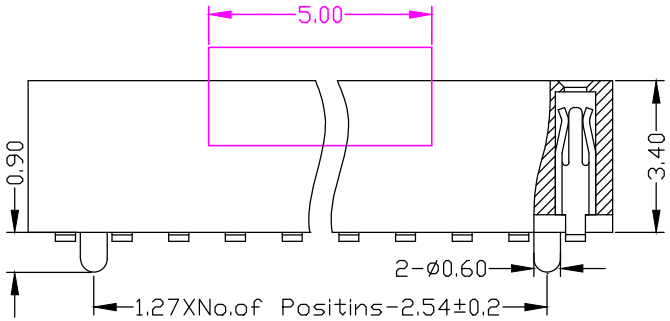

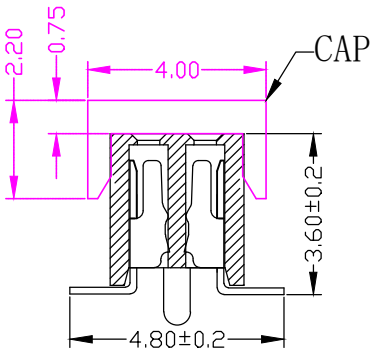

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION		SCALE	Fit
X.X	±0.25	UNIT	MM
X.XX	±0.20		
X.XXX	±0.10		
Angle	±3°		
DIM	TOL		

SIZE	A4	DESIGN	
SHEET	1/2	CHECK	
PROJ.		APPROVE	

JIANGJI® 苏州江基电子科技有限公司
SuZhou JiangJi Electronic Technology CO.LTD

PART NO.	B0334-12XXXXXCUX2
TITLE:	1.27mm 双排母 塑高3.4 SMT U型 带内柱
Customer No.	