

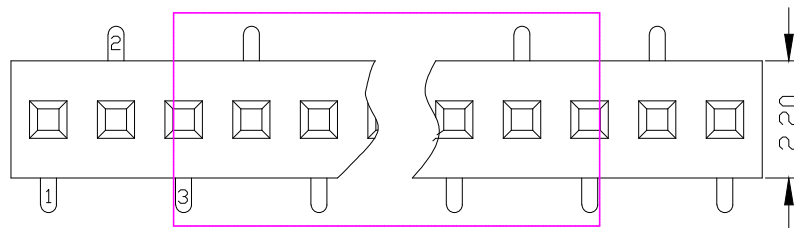


# Specifications

备注 (Remark)  
 1. 材料 (MATERIAL)  
 胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: PA6T+30%G.F UL94V-0, Color: Black  
 端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN  
 Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL  
 30u" MIN NICKEL UNDERPLATING OVER ALL



2. 特性 (characteristics):  
 额定电流: 1 AMP  
 Rating Current: 1 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40° C to +105° C  
 Temperature Range: -40° C to +105° C

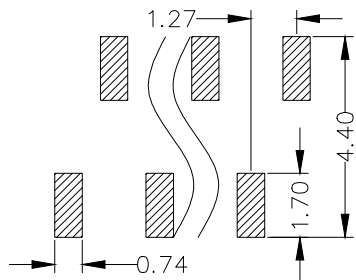

## Ordering Information

B0334-11 XX XX X CU X 1

NO. OF PINS PER ROW	Contact Plating	INSULATOR	PACKING
2~50P	Full Of Gold	MATERIAL:	A: PE Bag
	G0=0.8u"	L0=0.8U"	1: PBT
	G1=1u"	L1=1U"	2: PA46
	G2=1.5u"	L2=1.5U"	3: PA66
	G3=2u"	L3=2U"	4: PA6T
	G4=3u"	L4=3U"	5: PA9T
	G5=5u"	L5=5U"	6: LCP
	G6=10u"	L6=10U"	7:
	G7=15u"	L7=15U"	
	G8=20u"	L8=20U"	
	G9=30u"	L9=30U"	
	T1=Ordinary Tin Plated		
	T2=Matte Tin Plated		
	T3=Tin-plated High-temperature		
	T4=high temperature Matt tin		

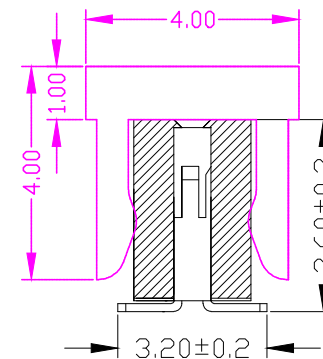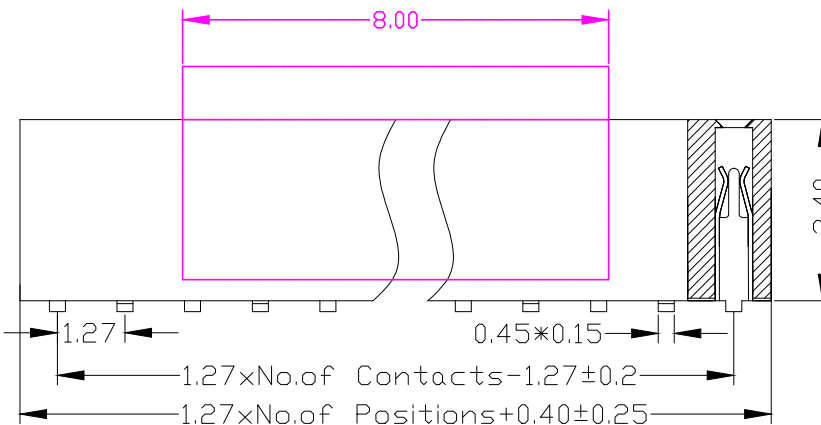

OPERATION		SCALE		Fit	
X.X	±0.25	UNIT		mm	
X.XX	±0.20	SIZE	A4	DESIGN	
X.XXX	±0.10	SHEET	1/1	CHECK	
Angle	±3°	PROJ.	☉	APPROVE	
DIM	TOL				

**JIANGJI**® 苏州江基电子科技有限公司  
 SuZhou JiangJi Electronic Technology CO. LTD

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	DESIGN	PART NO.	B0334-11XXXXXCUX1	
							TITLE:	1.27mm 单排母 塑高3.4 SMT U型 正脚位	
							Customer No.		