

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA9T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Phosphor bronze, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.






Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

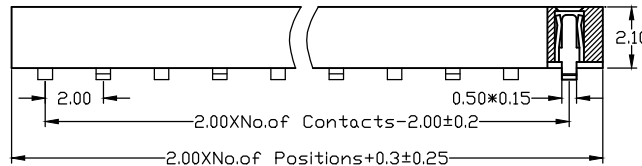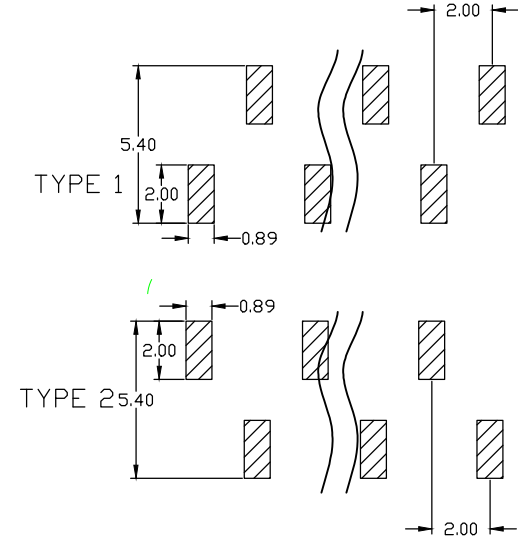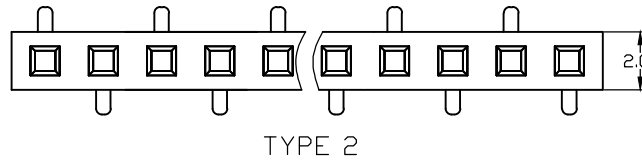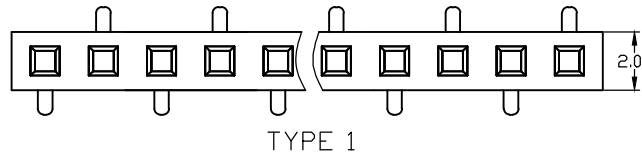

Ordering Information

B0521-11 XX XX X CU X 1

NO. OF PINS	Contact Plating		INSULATOR	PACKING
PER ROW	Full Of Gold	Semi-gold	MATERIAL:	A: PE Bag
2~50P	G0=0.8u"	L0=0.8u"	1: PBT	B: Tape & Reel
	G1=1u"	L1=1u"	2: PA46	C: Tube
	G2=1.5u"	L2=1.5u"	3: PA66	D: Tube+CAP
	G3=2u"	L3=2u"	4: PA6T	E: Tray
	G4=3u"	L4=3u"	5: PA9T	
	G5=5u"	L5=5u"	6: LCP	
	G6=10u"	L6=10u"	7:	
	G7=15u"	L7=15u"		
	G8=20u"	L8=20u"		
	G9=30u"	L9=30u"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high temperature Matt tin			

OPERATION		SCALE		Fit	
X.X	±0.25	UNIT		MM	
X.XX	±0.20	SIZE	A4	DESIGN	
X.XXX	±0.10	SHEET	1/1	CHECK	
Angle	±3°	PROJ.	☉	APPROVE	

JIANGJI 苏州江基电子科技有限公司
SuZhou JiangJi Electronic Technology CO. LTD

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	Customer No.

PART NO.	TITLE:
B0521-11XXXXCUX1	2.00mm排母 塑高2.1 SMT U型 正、反脚位