

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 30u" MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C



Temperature Range: -40°C to +105°C

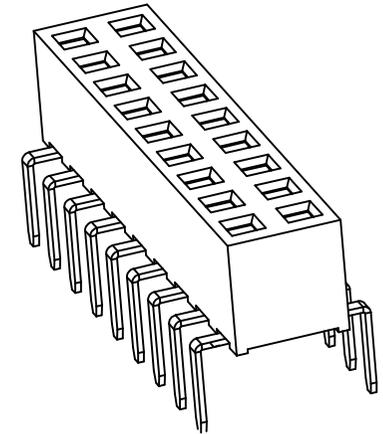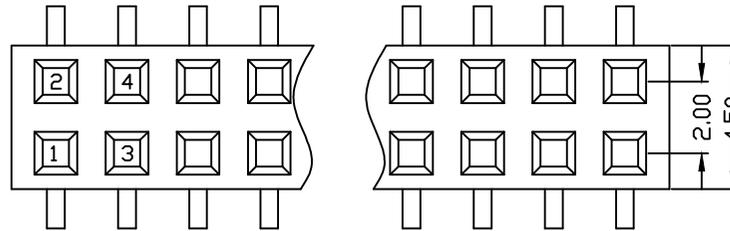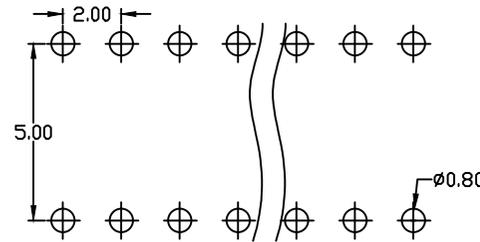

Ordering Information

B0543-12 XX XX X GU X 1

NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	PACKING
2~50P	Full Of Gold	Semi-gold	1:PBT	A:PE Bag
G0=0.8u"	L0=0.8U"	L1=1U"	2:PA46	B:Tape & Reel
G1=1u"	L2=1.5U"	L3=2U"	3:PA66	C:Tube
G2=1.5u"	L4=3U"	L4=3U"	4:PA6T	D:Tube+CAP
G3=2u"	L5=5U"	L6=10U"	5:PA9T	E:Tray
G4=3u"	L7=15U"	L8=20U"	6:LCP	
G5=5u"	L9=30U"		7:	
G6=10u"				
G7=15u"				
G8=20u"				
G9=30u"				
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high temperature Matt tin			

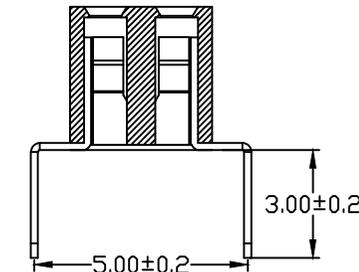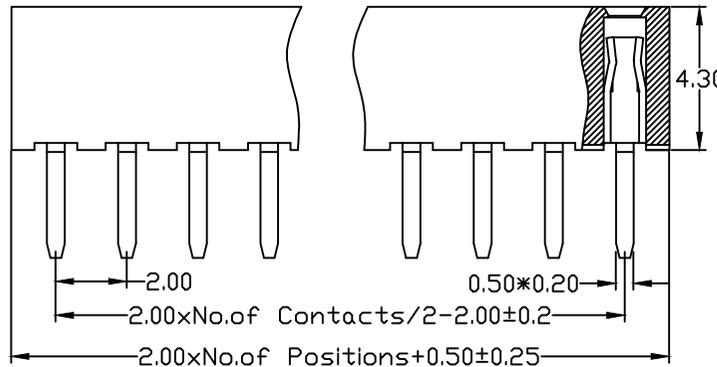

				OPERATION		SCALE		Fit		JIANGJI® 苏州江基电子科技有限公司	
				X.X	±0.25	UNIT		MM		SuZhou JiangJi Electronic Technology CO. LTD	
				X.XX	±0.20	SIZE	A4	DESIGN	PART NO.		B0543-12XXXXXGX1
				X.XXX	±0.10	SHEET	1/1	CHECK	TITLE:		2.00mm双排母 塑高4.3 蜈蚣脚 脚距5.0 U型
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE	Customer No.	
						DIM	TOL				