

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

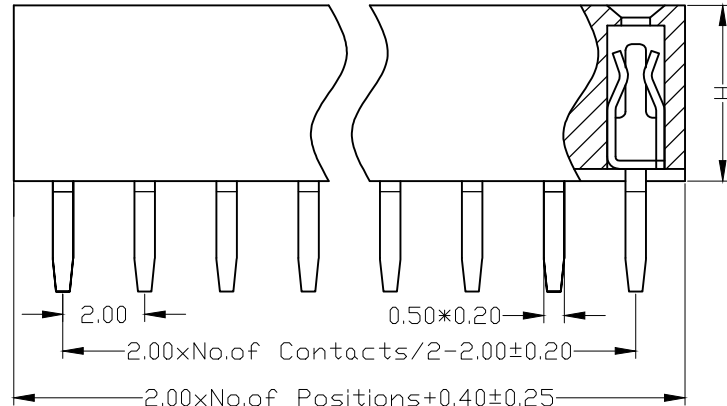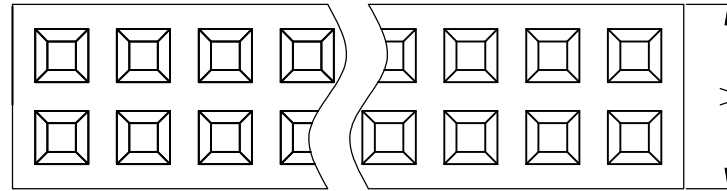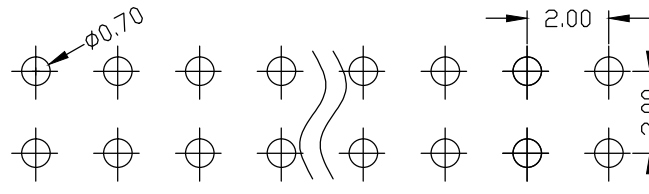

Ordering Information

B05XX-12 XX XX X FU X 1

NO. OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	PACKING
2~50P	Full Of Gold	Semi-gold	1: PBT	A: PE Bag
	G0=0.8u"	L0=0.8U"	2: PA46	B: Tape & Reel
	G1=1u"	L1=1U"	3: PA66	C: Tube
	G2=1.5u"	L2=1.5U"	4: PA6T	D: Tube+CAP
	G3=2u"	L3=2U"	5: PA9T	E: Tray
	G4=3u"	L4=3U"	6: LCP	
	G5=5u"	L5=5U"	7:	
	G6=10u"	L6=10U"		
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high temperature Matt tin			

Dimension antitheses list

ITEM	H			W
	Standard	4.0	4.3	
Alternate		常用		

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

DESIGN

CHECK

APPROVE

JIANGJI 苏州江基电子科技有限公司

SuZhou JiangJi Electronic Technology CO. LTD

PART NO.

TITLE:

Customer No.

B05XX-12XXXXXFUX1

2.00 双排母 2*xxP 180度 DIP:2.7

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE

1

2

3

4

5

6

7

8

9

10