Specifications

备注(Remark)
1.材料(MATERIAL)
胶芯：PA6T +30%G.F UL94V-0，颜色: 黑色.
Housing: PA6T +30%G.F UL94V-0,Color: Black
端子：磷/青铜，镍底30u"MIN,表面镀金lu"MIN
Contact: Phosphor bronze,lu"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2.特性 (characteristics):
额定电流：3 AMP
Raring Current: 3 AMP.
接触阻抗：20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗：1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压：AC 500V.
Withstanding Voltage: AC 500V.
温度范围：-40°C to+105°C
Temperture Range: -40°C to+105°C

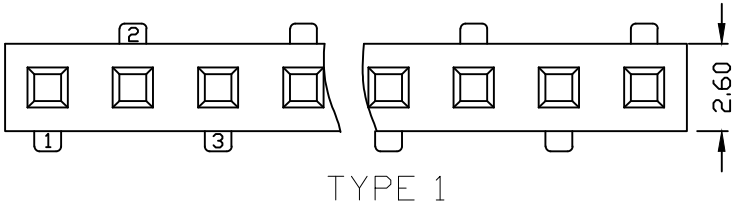

TYPE 1

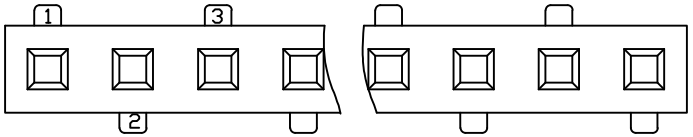

TYPE 2

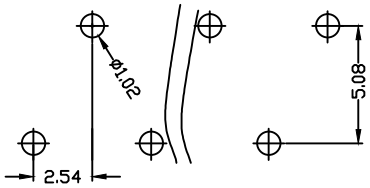

TYPE 1



TYPE 2

Ordering Information

B0750-11 XX XX X GU X 2

NO. OF PINS PER ROW	Contact Plating Full Of Gold	Contact Plating Semi-gold	INSULATOR MATERIAL:	PACKING
2~50P	G0=0.8u"	L0=0.8U"	1:PBT	A:PE Bag
	G1=1u"	L1=1U"	2:PA46	B:Tape & Reel
	G2=1.5u"	L2=1.5U"	3:PA66	C:Tube
	G3=2u"	L3=2U"	4:PA6T	D:Tube+CAP
	G4=3u"	L4=3U"	5:PA9T	E:Tray
	G5=5u"	L5=5U"	6:LCP	
	G6=10u"	L6=10U"	7:	
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high tempreture Matt tin			

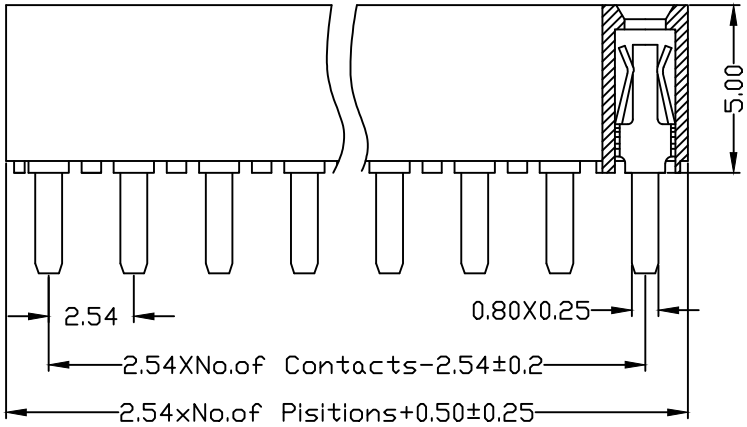



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION		SCALE	Fit
X.X	±0.25	UNIT	MM
X.XX	±0.20		
X.XXX	±0.10		
Angle	±3°		
DIM	TOL		

SIZE	A4	DESIGN	
SHEET	1/1	CHECK	
PROJ.		APPROVE	

JIANGJI® 苏州江基电子科技有限公司
SuZhou JiangJi Electronic Technology CO.LTD

PART NO.	B0750-11XXXXXGUX2
TITLE:	2.54mm 单排母 塑高5 蜈蚣脚 脚距5.08
Customer No.	