



Specifications

备注(Remark)
 1. 材料(MATERIAL)
 胶芯: PA6T+30%G.F UL94V-0, 颜色:黑色.
 Housing:PA6T+30%G.F UL94V-0, Color:Black
 端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact:Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL


2. 特性 (characteristics):
 额定电流: 3 AMP
 Raring Current:3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance:20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance:1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage:AC 500V.
 温度范围: -40° C to+105° C
 Temperture Range: -40° C to+105° C

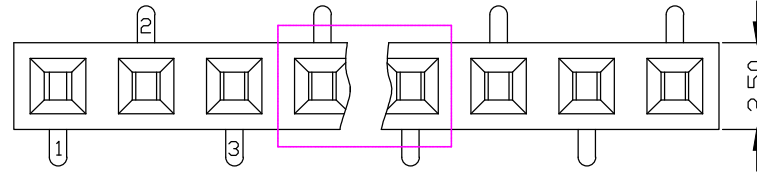


TYPE 1

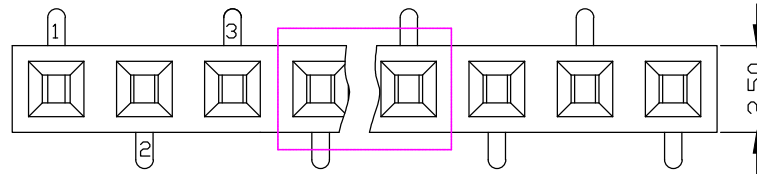



TYPE 2

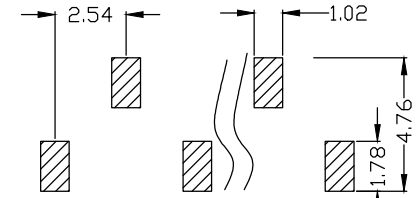

TYPE 1

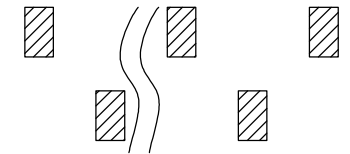

TYPE 2

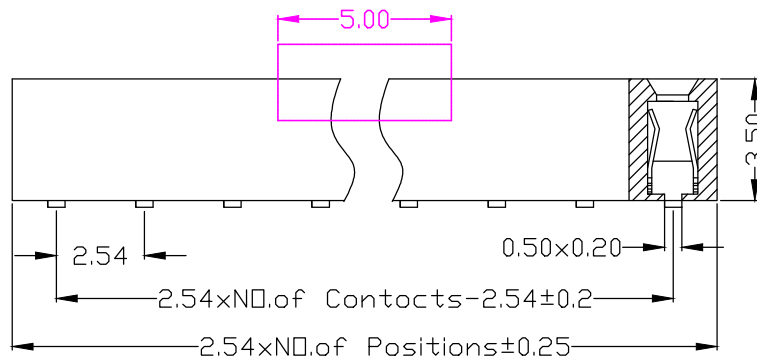

Ordering Information

B0736-11 XX XX X CU X 1

NO. OF PINS PER ROW	Contact Plating		INSULATOR	PACKING
2~50P	Full Of Gold	Semi-gold	MATERIAL:	A:PE Bag
	G0=0.8u"	L0=0.8U"	1:PBT	B:Tape & Reel
	G1=1u"	L1=1U"	2:PA46	C:Tube
	G2=1.5u"	L2=1.5U"	3:PA66	D:Tube+CAP
	G3=2u"	L3=2U"	4:PA6T	E:Tray
	G4=3u"	L4=3U"	5:PA9T	
	G5=5u"	L5=5U"	6:LCP	
	G6=10u"	L6=10U"	7:	
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high temperture Matt tin			

				OPERATION		SCALE		Fit		JIANGJI ® 苏州江基电子科技有限公司 SuZhou JiangJi Electronic Technology CO. LTD	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	PART NO.		B0736-11XXXXXCUX1
				X.XXX	±0.10	SHEET	1/1	CHECK	TITLE:		2.54mm单排母 塑高3.5 SMT U型
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE	Customer No.	