Specifications

备注(Remark)
1.材料(MATERIAL)
胶芯：PA6T/PBT+30%G.F UL94V-0，颜色: 黑色.
Housing: PA6T/PBT+30%G.F UL94V-0,Color: Black
端子：磷/青铜，镍底30u"MIN,表面镀金lu"MIN
Contact: Phosphor bronze,lu"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2.特性 (characteristics):
额定电流：3 AMP
Raring Current: 3 AMP.
接触阻抗：20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗：1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压：AC 500V.
Withstanding Voltage: AC 500V.
温度范围：-40°C to+105°C
Temperture Range: -40°C to+105°C





Ordering Information

B0757-11 XX XX X AY X 1

NO. OF PINS PER ROW
2~50P

Contact Plating

Full Of Gold	Semi-gold
G0=0.8u"	L0=0.8U"
G1=1u"	L1=1U"
G2=1.5u"	L2=1.5U"
G3=2u"	L3=2U"
G4=3u"	L4=3U"
G5=5u"	L5=5U"
G6=10u"	L6=10U"
G7=15u"	L7=15U"
G8=20u"	L8=20U"
G9=30u"	L9=30U"

T1=Ordinary Tin Plated
T2=Matte Tin Plated
T3=Tin-plated High-temperature
T4=high tempreture Matt tin

INSULATOR MATERIAL:
1:PBT
2:PA46
3:PA66
4:PA6T
5:PA9T
6:LCP
7:

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

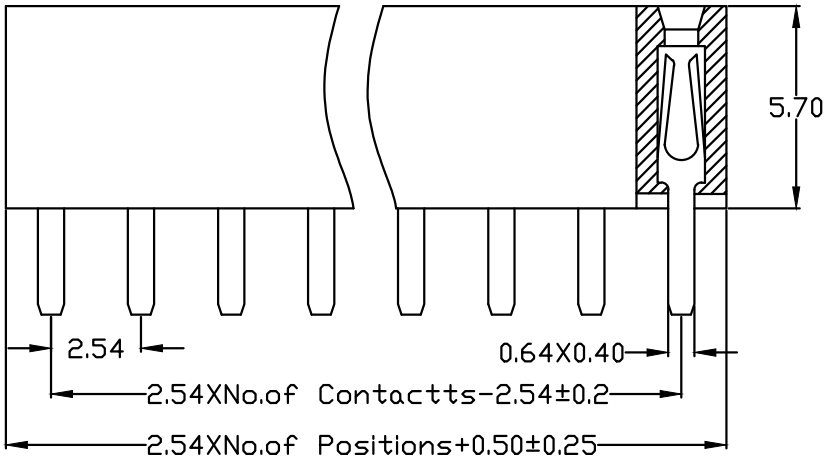



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION	
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE	Fit		
UNIT	MM		
SIZE	A4	DESIGN	
SHEET	1/1	CHECK	
PROJ.		APPROVE	

JIANGJI® 苏州江基电子科技有限公司
SuZhou JiangJi Electronic Technology CO.LTD

PART NO.	B0757-11XXXXXAYX1
TITLE:	2.54mm单排母 塑高5.7 180度 Y型
Customer No.	