


PCB Layout Diagram  
Top View

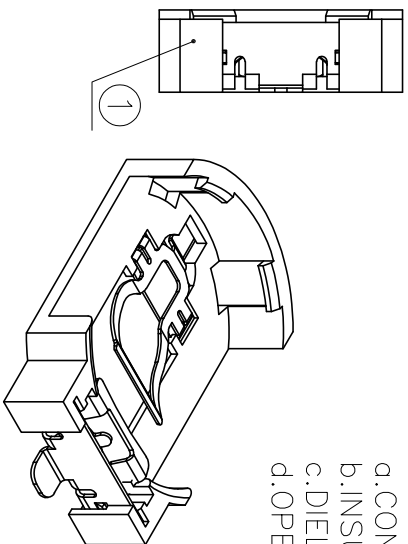

NOTE:  
1. MATERIAL:  
a. HOUSING: PPA  
b. CONTACT: PHOSPHOR BRONZE  
(SURFACE PLATING: Au1u")  
SEE ORDERING INFORMATION

2. ELECTRIC:  
a. CONTACT RESISTANCE: 30 MILLIOHMS MAX  
b. INSULATION RESISTANCE: 100 MEGA OHMS MIN  
c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL  
d. OPERATING TEMPERATURE: -25° C ~ +85° C

### ORDERING INFORMATION

## BS-08-B\*\*\*001

电池座系列  
BS-08系列  
SMT 180° TYPE

MATERIAL:  
1A-PBT BLACK  
1B-PA66 BLACK  
2A-PPA BROWN  
2B-PPA BLACK  
3A-PPS BROWN  
3B-PPS BLACK  
4A-LCP WHITE  
4B-LCP BLACK

PLATING:  
A-Au1u"  
J-Ni100u"~120u"  
K-Sn100u"~120u"

OPERATION	SCALE	Fit
X.X	MM	Fit
X.XX		
X.XXX		
ANGEL		
DIM		

SIZE	DESIGN
A4	
SHEET	CHECK
I/1	

**JIANGJI** 苏州江基电子科技有限公司  
Suzhou Jiangji Electronic Technology CO.,LTD

PART NO. 2032-棕色电池座  
TITLE: BS-08-B\*\*\*001  
Customer No.

REV DATE

DOIFICATION DESCRIPTION

CHANGE APPROVE

DIM TOL

PROJ.

APPROVE

1 2 3 4 5 6 7 8 9 10