

1 2 3 4 5 6 7 8 9 10

Specifications

A 备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30μ MIN, 表面镀金10μ MIN

Contact: Phosphor bronze, 10μ MIN GOLD PLATING OVER ALL
30μ MIN NICKEL UNDERPLATING OVER ALL

2. 特性(characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

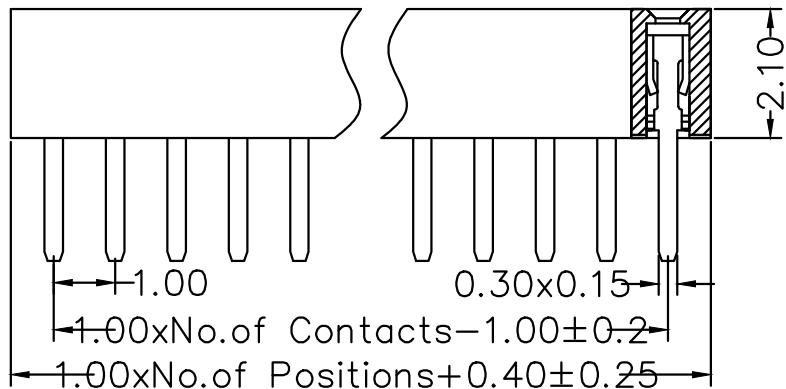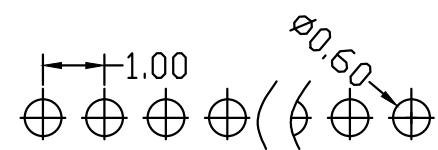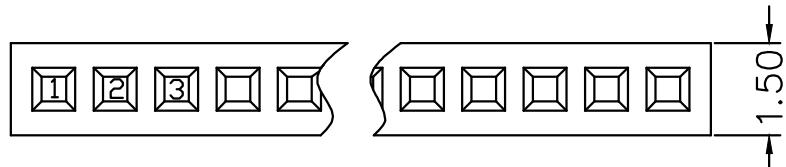

B Ordering Information

B0221-11 XX XX X AU X 1

NO. OF PINS PER ROW	Contact Full Of Gold	Plating Semi-gold	INSULATOR MATERIAL:	PACKING
2~50P	G0=0.8u"	L0=0.8u"	1:PBT	A:PE Bag
	G1=1u"	L1=1u"	2:PA46	B:Tape & Reel
	G2=1.5u"	L2=1.5u"	3:PA66	C:Tube
	G3=2u"	L3=2u"	4:PA6T	D:Tube+CAP
	G4=3u"	L4=3u"	5:PA9T	E:Tray
	G5=5u"	L5=5u"	6:LCP	
	G6=10u"	L6=10u"	7:	
	G7=15u"	L7=15u"		
	G8=20u"	L8=20u"		
	G9=30u"	L9=30u"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high temperture Matt tin			

苏州瀚牧锦电子有限公司

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		SIZE	A4	DESIGN	PART NO.
						DIM	TOL	UNIT	MM	MM	MM				
						X.X	±0.25								B0221-11XXXXXAU1
						X.XX	±0.20								
						X.XXX	±0.10								
						Angle	±3°								
						SHEET	1/1	CHECK							
						PROJ.	◆	APPROVE							
						DIM	TOL								
						Customer No.									

1 2 3 4 5 6 7 8 9 10