
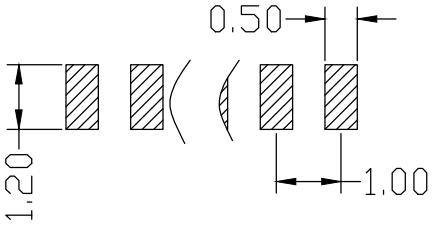


Specifications

备注(Remark)
1. 材料(MATERIAL)
胶芯: PA9T+30%G.F UL94V-0, 颜色:黑色.
Housing:PA9T+30%G.F UL94V-0, Color:Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact:Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current:1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance:20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance:1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage:AC 500V.
温度范围: -40° C to+105° C
Temperture Range: -40° C to+105° C

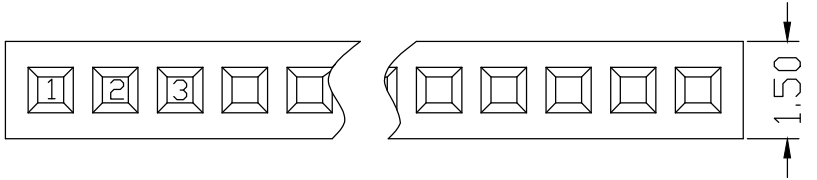

Ordering Information
B0221-11 XX XX X DU X 1



NO. OF PINS
PER ROW
2~50P

Contact Plating
Full Of Gold
G0=0.8u"
G1=1u"
G2=1.5u"
G3=2u"
G4=3u"
G5=5u"
G6=10u"
G7=15u"
G8=20u"
G9=30u"
T1=Ordinary Tin Plated
T2=Matte Tin Plated
T3=Tin-plated High-temperature
T4=high tempreture Matt tin

Semi-gold
L0=0.8u"
L1=1u"
L2=1.5u"
L3=2u"
L4=3u"
L5=5u"
L6=10u"
L7=15u"
L8=20u"
L9=30u"

INSULATOR
MATERIAL:
1:PBT
2:PA46
3:PA66
4:PA6T
5:PA9T
6:LCP
7:

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

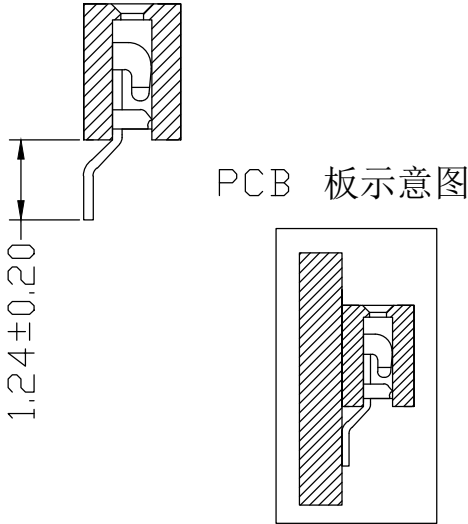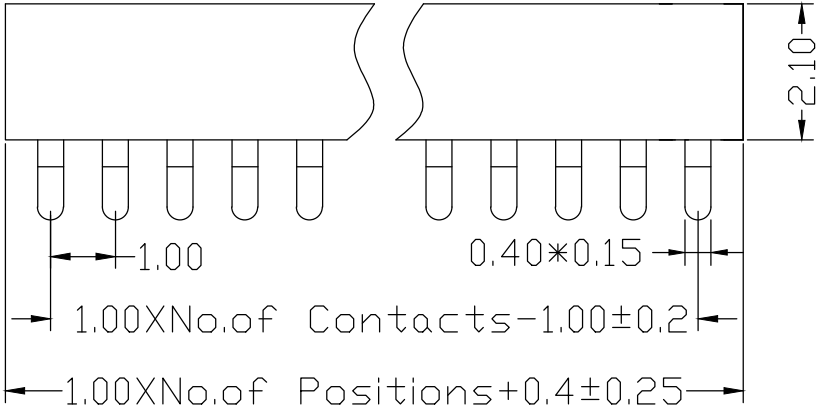

					OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	B0221-11XXXXDUX1	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.00mm 单排母 塑高2.1 卧式SMT U型	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.		