






Specifications

- 备注 (Remark)
1. 材料 (MATERIAL)
- 胶芯: LCP+30%G. F UL94V-0, 颜色: 黑色.
- Housing: LCP+30%G. F UL94V-0, Color: Black
- 端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN
- Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL 30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
- 额定电流: 1 AMP
- Rated Current: 1 AMP.
- 接触阻抗: 20 mΩ MAX.
- Contact Resistance: 20 mΩ MAX.
- 绝缘阻抗: 1000 MΩ MIN.
- Insulating Resistance: 1000 MΩ MIN.
- 耐电压: AC 500V.
- Withstanding Voltage: AC 500V.
- 温度范围: -40° C to +105° C
- Temperature Range: -40° C to +105° C

Ordering Information

B0220-11 XX XX X CC X 1

NO. OF PINS	Contact Plating	INSULATOR MATERIAL:	PACKING
PER ROW	Full Of Gold	Semi-gold	A: PE Bag
2~50P	60=0.8u"	L0=0.8U"	B: Tape & Reel
	61=1u"	L1=1U"	C: Tube
	62=1.5u"	L2=1.5U"	D: Tube+CAP
	63=2u"	L3=2U"	E: Tray
	64=3u"	L4=3U"	
	65=5u"	L5=5U"	
	66=10u"	L6=10U"	7: LCP
	67=15u"	L7=15U"	
	68=20u"	L8=20U"	
	69=30u"	L9=30U"	
		T1=Ordinary Tin Plated	
		T2=Matte Tin Plated	
		T3=Tin-plated High-temperature	
		T4=high temperature Matt tin	

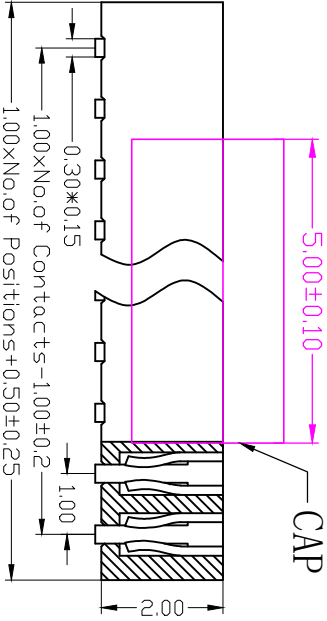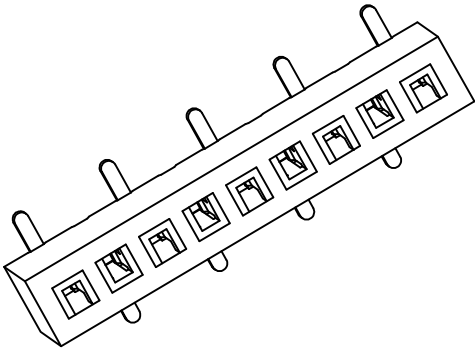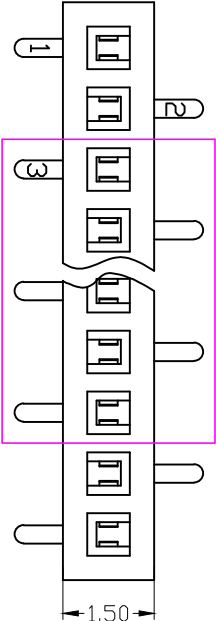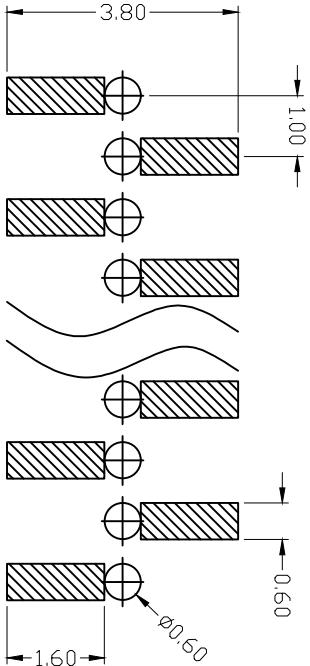

REV	DATE	DOIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.
1									

OPERATION	SCALE	Fit
X.X	UNIT	MM
X.XX	±0.20	
X.XXX	±0.10	
ANGEL	±3°	

SIZE	DESIGN
A4	
SHEET I/1	CHECK

PART NO.	TITLE:
B0220-11XXXXCCX1	1.00mm单排母 塑高2.0 SMT 上插式 正脚位

苏州瀚牧锦电子有限公司

司