
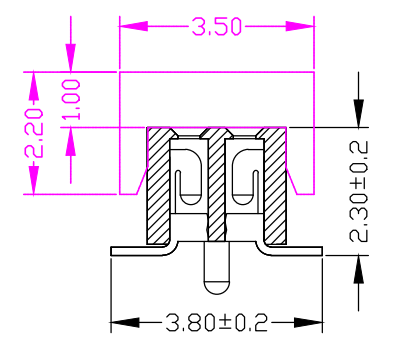
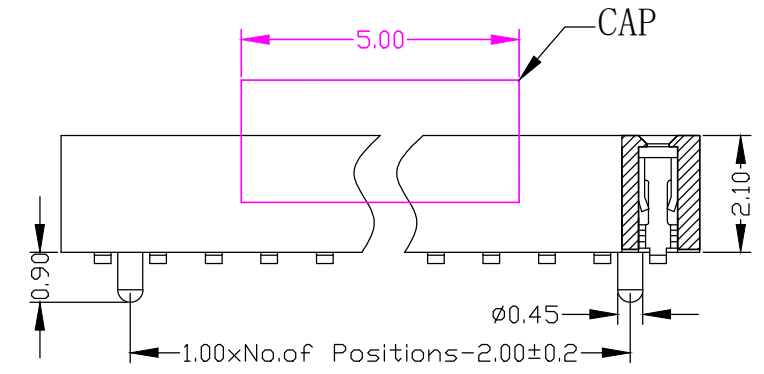
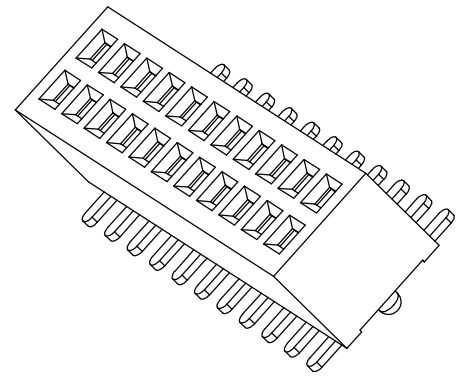


Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

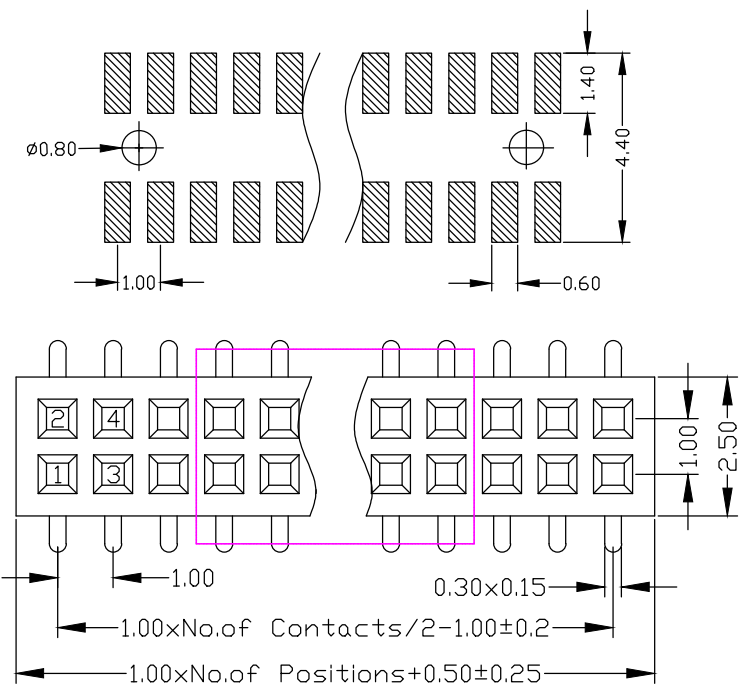

Ordering Information
B0221-12 XX XX X CU X 2

NO. OF PINS PER ROW 2~50P	Contact Plating		INSULATOR MATERIAL: 1:PBT 2:PA46 3:PA66 4:PA6T 5:PA9T 6:LCPC 7:	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
	Full Of Gold	Semi-gold		
	G0=0.8u"	L0=0.8U"		
	G1=1u"	L1=1U"		
	G2=1.5u"	L2=1.5U"		
	G3=2u"	L3=2U"		
	G4=3u"	L4=3U"		
	G5=5u"	L5=5U"		
	G6=10u"	L6=10U"		
	G7=15u"	L7=15U"		
G8=20u"	L8=20U"			
G9=30u"	L9=30U"			
T1=Ordinary Tin Plated				
T2=Matte Tin Plated				
T3=Tin-plated High-temperature				
T4=high temperture Matt tin				

				OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司	
				X.X	±0.25	UNIT		MM		
				X.XX	±0.20	SIZE	A4	DESIGN	PART NO.	B0221-12XXXXXCUX2
				X.XXX	±0.10	SHEET	1/1	CHECK	TITLE:	1.00mm 双排母 塑高2.1 SMT 带柱 U型
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	PROJ.	APPROVE	Customer No.		
1		2		3		4		5	6	10