
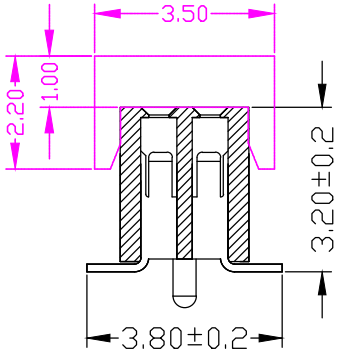
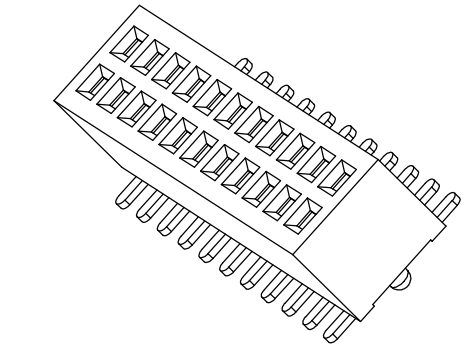


Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G.F UL94V-0, Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current: 1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

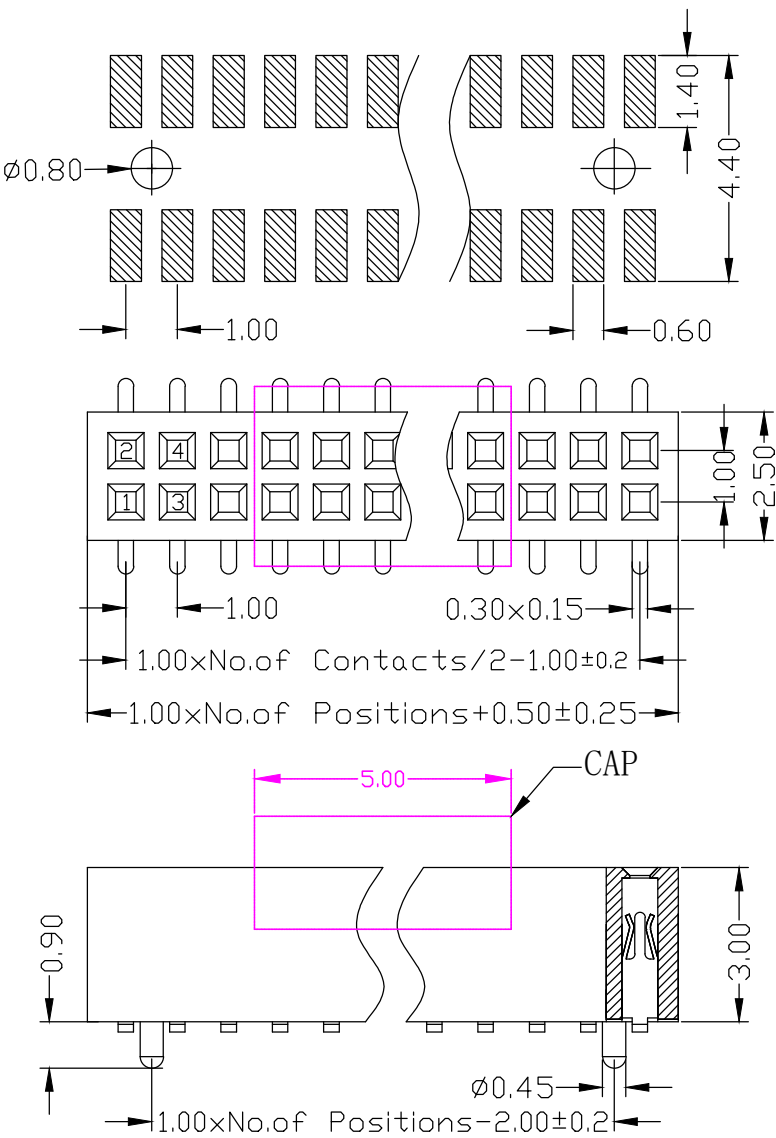

Ordering Information
B0230-12 XX XX X CU X 2

NO.OF PINS PER ROW 2`50P	Contact Plating		INSULATOR MATERIAL:	PACKING
	Full Of Gold	Semi-gold		
G0=0.8u"	L0=0.8U"	1:PBT	A:PE Bag	
G1=1u"	L1=1U"	2:PA46	B:Tape & Reel	
G2=1.5u"	L2=1.5U"	3:PA66	C:Tube	
G3=2u"	L3=2U"	4:PA6T	D:Tube+CAP	
G4=3u"	L4=3U"	5:PA9T	E:Tray	
G5=5u"	L5=5U"	6:LCP		
G6=10u"	L6=10U"	7:		
G7=15u"	L7=15U"			
G8=20u"	L8=20U"			
G9=30u"	L9=30U"			
T1=Ordinary Tin Plated				
T2=Matte Tin Plated				
T3=Tin-plated High-temperature				
T4=high temperture Matt tin				

				OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	PART NO.		B0230-12XXXXXCUX2	
				X.XXX	±0.10	SHEET	1/1	CHECK	TITLE:		1.00mm 双排母 塑高3.2 SMT 带柱 U型	
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	PROJ.	APPROVE	APPROVE	Customer No.			