



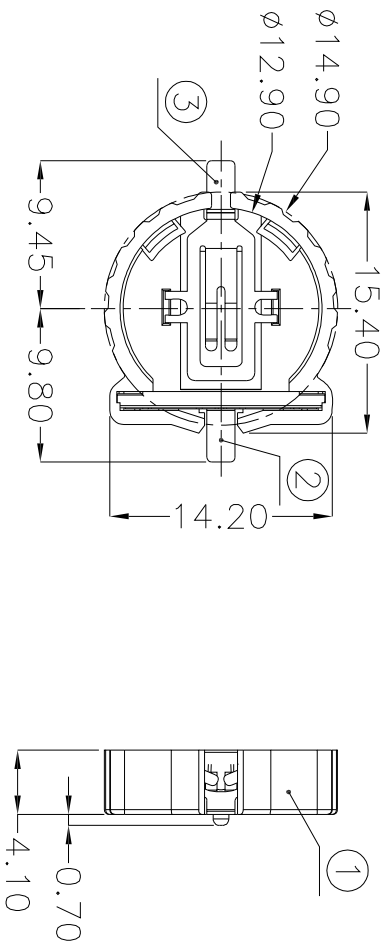

- 1.MATERIAL:
a.HOUSING:PPS UL94V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING:Au1u")

SEE ORDERING INFORMATION

- 2.ELECTRIC:
a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

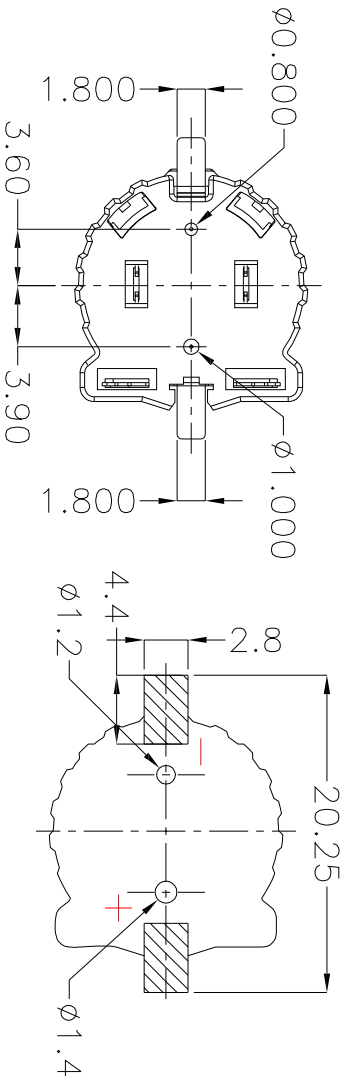

PCB Layout Diagram
Top View

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPS	BROWN
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR

苏州瀚牧锦电子有限公司

PART NO. 1220棕色电池座-贴片

TITLE: BS-1220-B3AA003

OPERATION		SCALE		Customer No.	
X.X	±0.25	UNIT	Fit		
X.XX	±0.20	SIZE	A4	DESIGN	
X.XXX	±0.10	SHEET	I/I		
ANGEL	±3°	PROJ.	☐	APPROVE	
DIM	TOL	PROJ.	☐		
REV	DATE	DOIFICATION DESCRIPTION		CHANGE	
1		2		3	
		4		5	
		6		7	
		8		9	
		10			