
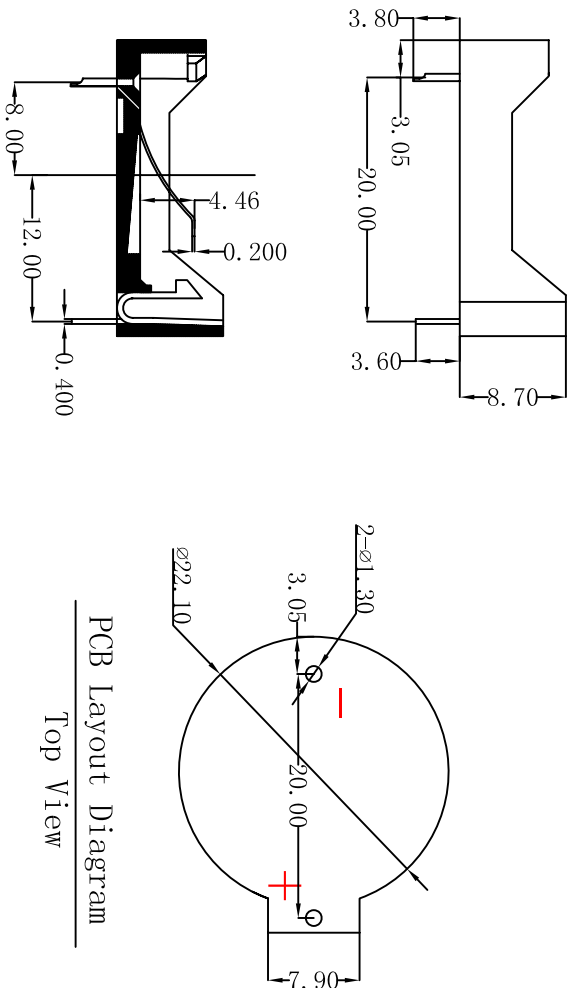


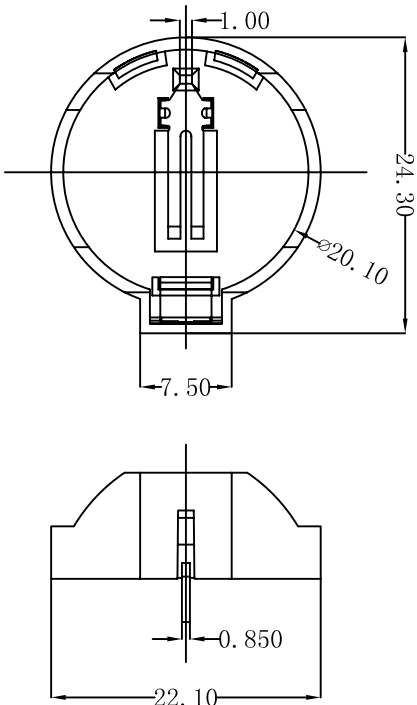

PCB Layout Diagram  
Top View

- NOTE:
- MATERIAL:
    - HOUSING: PBT
    - CONTACT: BRASS(SURFACE PLATING: Sn100u")
  - ELECTRIC:
    - CONTACT RESISTANCE: 30 MILLIOHMS MAX
    - INSULATION RESISTANCE: 1000 MEGA OHMS MIN
    - DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
    - OPERATING TEMPERATURE: -25° C ~ +85° C
- SEE ORDERING INFORMATION

## ORDERING INFORMATION

BS-02-A\*\*\*001

电池座系列 — A-Au1U"  
J-Ni100U"~120U"  
K-SN100U"~120U"

BS-2系列

DIP 90° TYPE

PLATING:  
A-Au1U"  
J-Ni100U"~120U"  
K-SN100U"~120U"

MATERIAL:  
1A-PBT BLACK  
1B-PA66 BLACK  
2A-PPA BROWN  
2B-PPA BLACK  
3A-PPS BROWN  
3B-PPS BLACK  
4A-LCP WHITE  
4B-LCP BLACK  
5A-PA6T BLACK

苏州瀚牧锦电子有限公司

2032黑色电池座直插

BS-02-A\*\*\*001

| OPERATION |       | SCALE                   |        | DESIGN  |              |
|-----------|-------|-------------------------|--------|---------|--------------|
| X.X       | ±0.25 | UNIT                    | Fit    | SIZE    | CHECK        |
| X.XX      | ±0.20 | A4                      | MM     | I/1     | APPROVE      |
| X.XXX     | ±0.10 | SHEET                   |        |         |              |
| ANGEL     | ±3°   | PROJ.                   |        |         |              |
| DIM       | TOL   |                         |        |         |              |
| REV       | DATE  | DOIFICATION DESCRIPTION | CHANGE | APPROVE | Customer No. |