

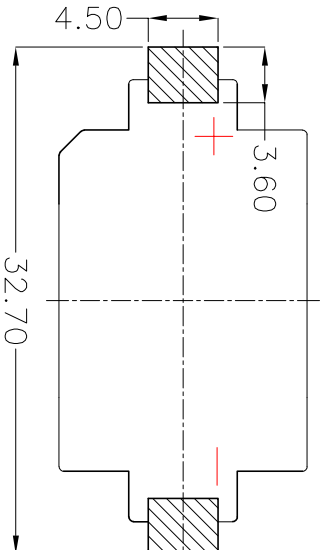
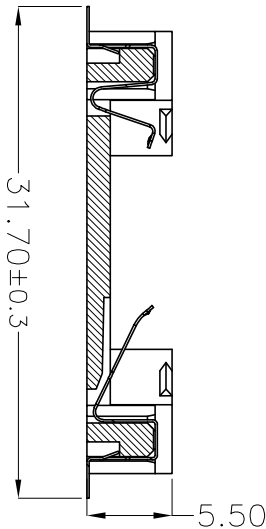



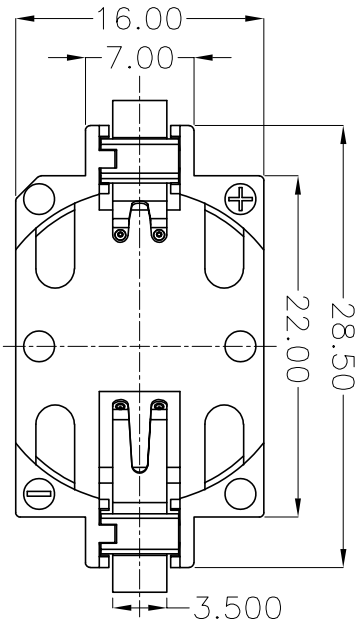

PCB Layout Diagram
Top View

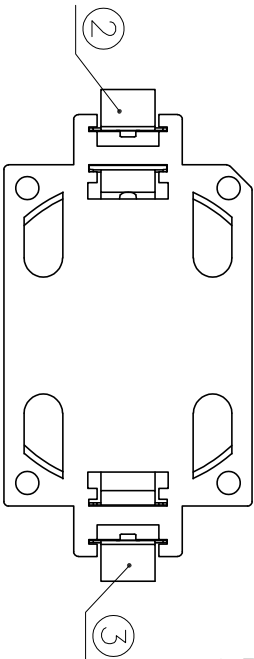

- 1.MATERIAL:
- a.HOUSING:LCP UL94V-0
 - b.CONTACT:PHOSPHOR BRONZE (SURFACE PLATING: Au1u")

- 2.ELECTRIC:
- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
 - b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
 - c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
 - d.OPERATING TEMPERATURE: -25°C~ +85°C

SEE ORDERING INFORMATION

ORDERING INFORMATION

BS-06-B***002

电池座系列

BS-06系列

SMT 180° TYPE

MATERIAL:

- 1A-PBT BLACK
- 1B-PA66 BLACK
- 2A-PPA BROWN
- 2B-PPA BLACK
- 3A-PPS BROWN
- 3B-PPS BLACK
- 4A-LCP WHITE
- 4B-LCP BLACK
- 5A-PA6T WHITE
- 5B-PA6T BLACK

PLATING:

- A-Au1U"
- J-Ni100U"~120U"
- K-Sn100U"~120U"

苏州瀚牧锦电子有限公司

2032贴片-白色电池座

BS-06-B***002

OPERATION		SCALE			
		UNIT	Fit		
		MM			
		X.X	±0.25		
		X.XX	±0.20		
		X.XXX	±0.10		
		ANGEL	±3°		
REV	DATE	DOIFICATION DESCRIPTION	CHANGE	APPROVE	
1					