


Specifications


备注(Remark)
1.材料(MATERIAL)
胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T/PBT+30%G.F UL94V-0,Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2.特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to+105°C
Temperture Range: -40°C to+105°C

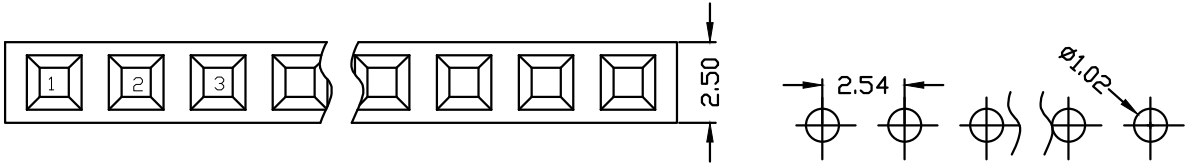

Ordering Information

B0785-11 XX XX X AY X 1

NO.OF PINS PER ROW	Contact Plating		INSULATOR	PACKING
	Full Of Gold	Semi-gold		
2~50P	G0=0.8u"	L0=0.8U"	MATERIAL: 1:PBT	A:PE Bag
	G1=1u"	L1=1U"	2:PA46	B:Tape & Reel
	G2=1.5u"	L2=1.5U"	3:PA66	C:Tube
	G3=2u"	L3=2U"	4:PA6T	D:Tube+CAP
	G4=3u"	L4=3U"	5:PA9T	E:Tray
	G5=5u"	L5=5U"	6:LCP	
	G6=10u"	L6=10U"	7:	
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high temperture Matt tin			

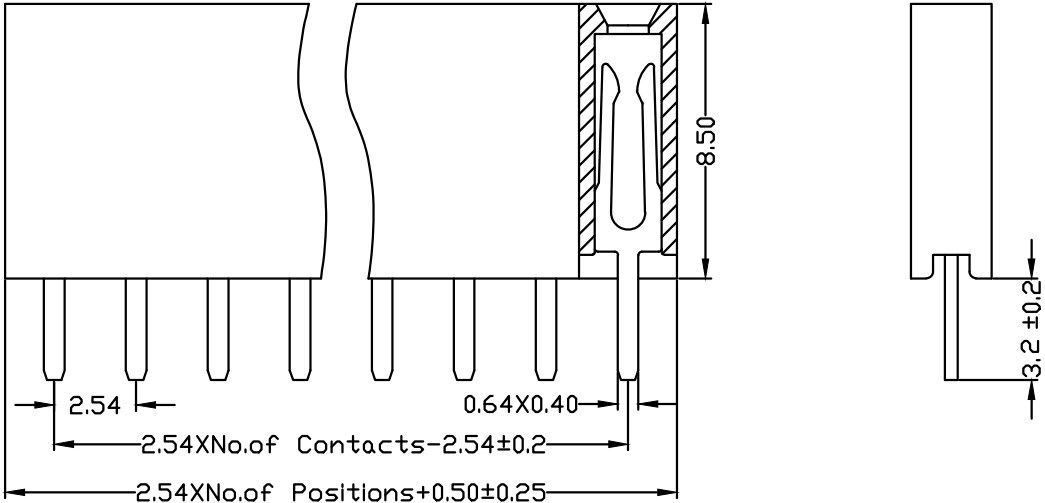

					OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	B0785-11XXXXXAYX1	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54mm 单排母 塑高8.5 180度 Y型	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	