



Specifications


备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T +30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T +30%G. F UL94V-0, Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40° C to +105° C
Temperture Range: -40° C to +105° C

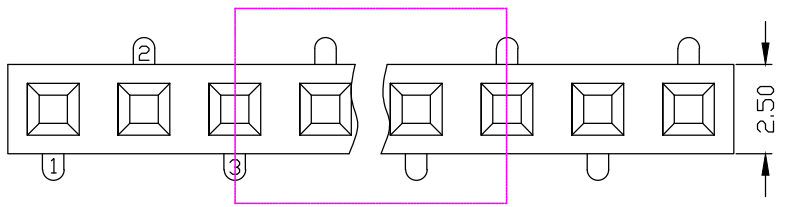


TYPE 1

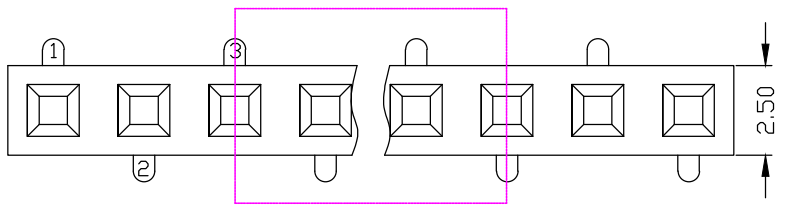



TYPE 2

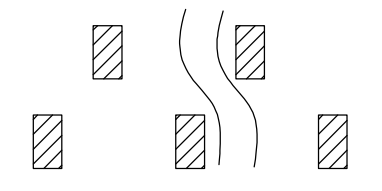

TYPE 1

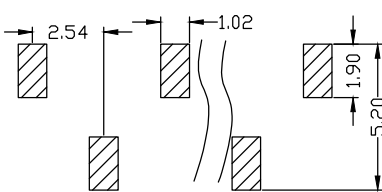

TYPE 2

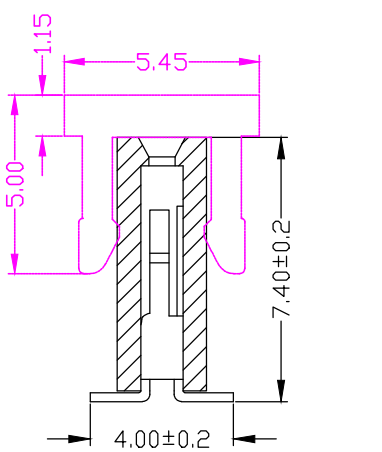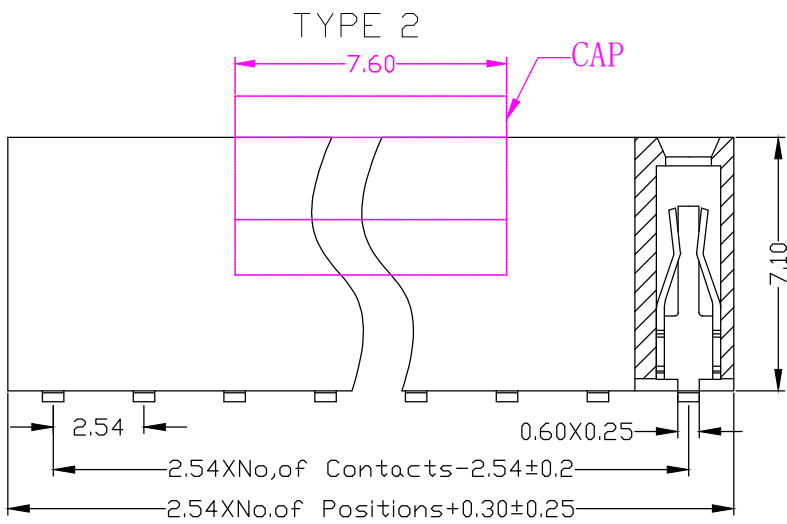

Ordering Information

B0771-11 XX XX X CU X 1

NO. OF PINS PER ROW 2~50P	Contact Plating		INSULATOR	PACKING
	Full Of Gold	Semi-gold	MATERIAL:	A: PE Bag
G0=0.8u"	L0=0.8U"	1: PBT		B: Tape & Reel
G1=1u"	L1=1U"	2: PA46		C: Tube
G2=1.5u"	L2=1.5U"	3: PA66		D: Tube+CAP
G3=2u"	L3=2U"	4: PA6T		E: Tray
G4=3u"	L4=3U"	5: PA9T		
G5=5u"	L5=5U"	6: LCP		
G6=10u"	L6=10U"	7:		
G7=15u"	L7=15U"			
G8=20u"	L8=20U"			
G9=30u"	L9=30U"			
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high tempreture Matt tin			

				OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司	
				X.X	±0.25	UNIT		MM		
				X.XX	±0.20	SIZE	A4	DESIGN	PART NO.	B0771-11XXXXXCUX1
				X.XXX	±0.10	SHEET	1/1	CHECK	TITLE:	2.54mm 单排母 塑高7.1 SMT
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	PROJ.	APPROVE	Customer No.		