

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0,Color: Black

端子：磷/青铜，镍底30μ"MIN, 表面镀金1μ"MIN

Contact: Phosphor bronze, 1μ" MIN GOLD PLATING OVER ALL
30μ" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: $20 \text{ m}\Omega$ MAX.

Contact Resistance: 20

绝缘阻抗: 1000 M Ω MIN.

Insulating Resistance: 1

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

B07XX-11 XX XX X AC X 1




NO. OF PINS	Contact	Plating	INSULATOR	PACKING
PER ROW	Full Of Gold	Semi-gold	MATERIAL:	A:PE Bag
2~50P	G0=0.8u"	L0=0.8U"	1:PBT	B:Tape & Reel
	G1=1u"	L1=1U"	2:PA46	C:Tube
	G2=1.5u"	L2=1.5U"	3:PA66	D:Tube+CAP
	G3=2u"	L3=2U"	4:PA6T	E:Tray
	G4=3u"	L4=3U"	5:PA9T	
	G5=5u"	L5=5U"	6:LCP	
	G6=10u"	L6=10U"	7:	
	G7=15u"	L7=15U"		
	G8=20u"	L8=20U"		
	G9=30u"	L9=30U"		

T1=Ordinary Tin Plated

T2=Matte Tin Plated

T3=Tin-plated High-temperature Tin-lead M

T4=high tempreature Matt tin

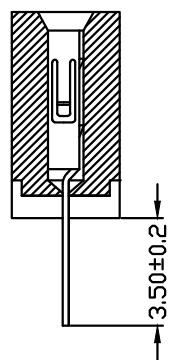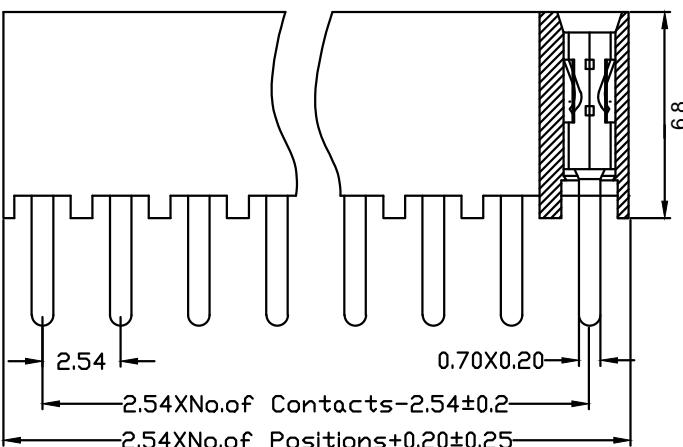

				OPERATION		SCALE		Fit		苏州瀚牧锦电子有限公司	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	B07XX-11XXXXXACX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 单排母 180度 上插式
V	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	
1	2	3	4	5	6	7	8	9	10	11	12