


Specifications


备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black
端子: 磷铜, 镍底30u"MIN, 表面镀金u"MIN
Contact: Phosphor ,lu"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current:1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance:20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance:1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to+105°C
Temperture Range: -40°C to+105°C

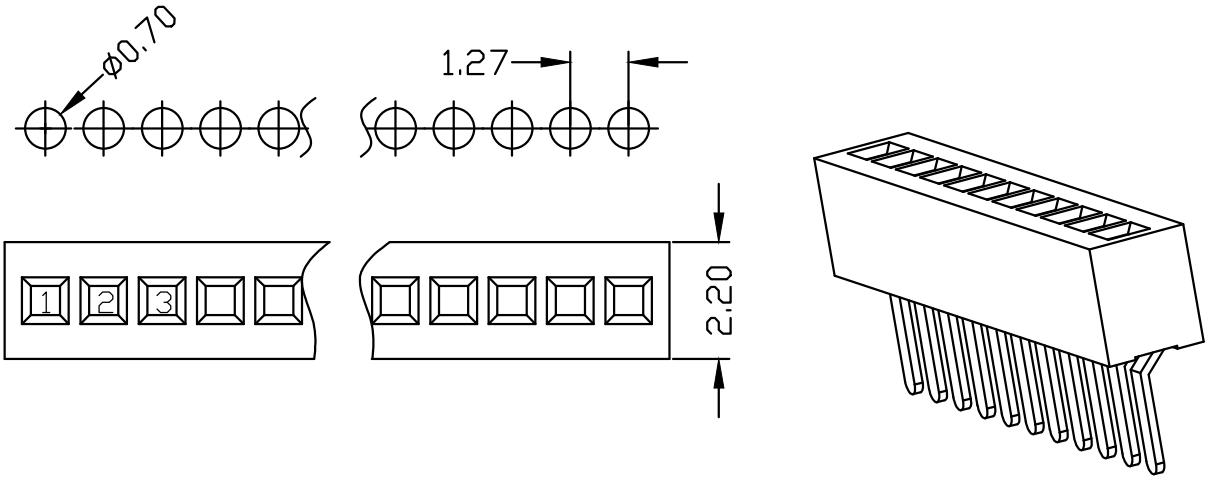

Ordering Information

B0334-11 XX XX X AU X 1

NO. OF PINS PER ROW 2~50P	Contact Plating		INSULATOR MATERIAL:	PACKING
	Full Of Gold	Semi-gold		
G0=0.8u"	L0=0.8U"	1:PBT	A:PE Bag	
G1=1u"	L1=1U"	2:PA46	B:Tape & Reel	
G2=1.5u"	L2=1.5U"	3:PA66	C:Tube	
G3=2u"	L3=2U"	4:PA6T	D:Tube+CAP	
G4=3u"	L4=3U"	5:PA9T	E:Tray	
G5=5u"	L5=5U"	6:LCP		
G6=10u"	L6=10U"	7:		
G7=15u"	L7=15U"			
G8=20u"	L8=20U"			
G9=30u"	L9=30U"			
T1=Ordinary Tin Plated				
T2=Matte Tin Plated				
T3=Tin-plated High-temperature				
T4=high temperture Matt tin				

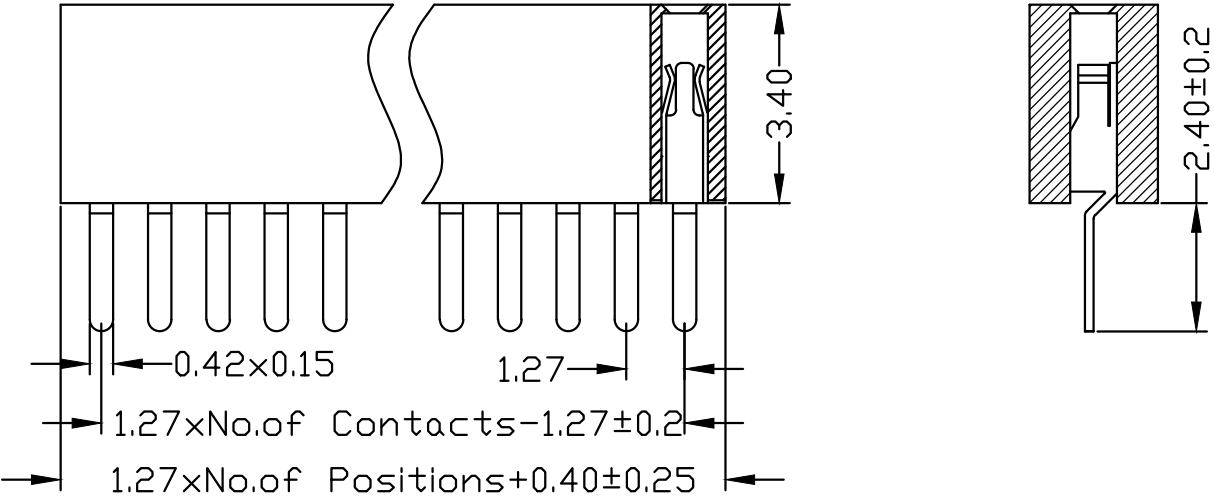

						OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	B0334-11XXXXAUX1	
						X.XXX	±0.10							
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27mm 单排母 塑高3.4 180度 U型	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	