

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10

Specifications

A 备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30μ"MIN, 表面镀金μ"MIN

Contact: Phosphor bronze, μ"MIN GOLD PLATING OVER ALL
30μ" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

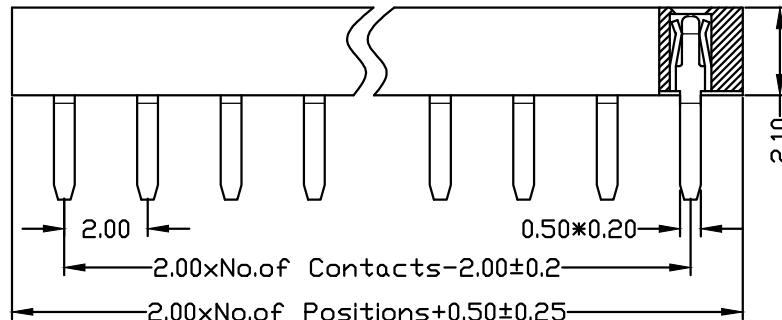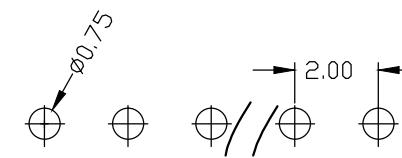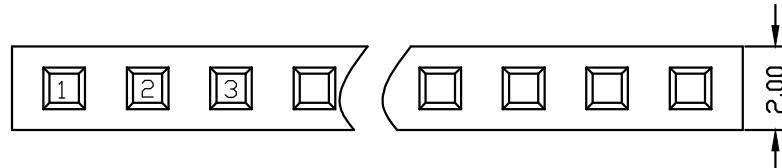

D Ordering Information

B0521-11 XX XX X AU X 1

NO. OF PINS PER ROW	Contact Plating	INSULATOR	PACKING
2~50P	Full Of Gold	Semi-gold	MATERIAL: A:PE Bag
	G0=0.8μ"	L0=0.8μ"	B:Tape & Reel
	G1=1μ"	L1=1μ"	C:Tube
	G2=1.5μ"	L2=1.5μ"	D:Tube+CAP
	G3=2μ"	L3=2μ"	E:Tray
	G4=3μ"	L4=3μ"	
	G5=5μ"	L5=5μ"	5:PA9T
	G6=10μ"	L6=10μ"	6:LCP
	G7=15μ"	L7=15μ"	7:
	G8=20μ"	L8=20μ"	
	G9=30μ"	L9=30μ"	

T1=Ordinary Tin Plated

T2=Matte Tin Plated

T3=Tin-plated High-temperature

T4=high temperature Matt tin

DIM"A"	2.50
--------	------

苏州瀚牧锦电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	UNIT	MM	DESIGN	PART NO.	TITLE:
					DIM	TOL	SIZE	A4						
					X.X	±0.25								
					X.XX	±0.20								
					X.XXX	±0.10								
					Angle	±3°								
					SHEET	1/1	CHECK							
					PROJ.	APPROVE								
					DIM	TOL								
					Customer No.									

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10