
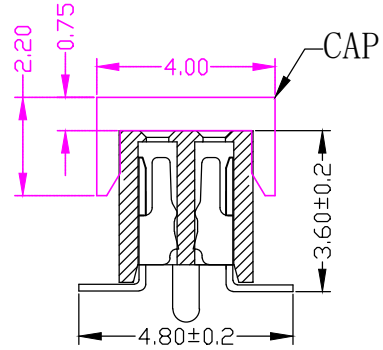
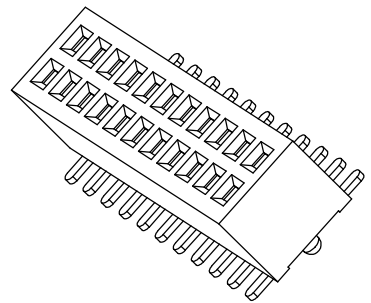


Specifications

备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T+30%G. F UL94V-0, 颜色:黑色.
Housing:PA6T+30%G. F UL94V-0, Color:Black
端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact:Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 1 AMP
Raring Current:1 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance:20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance:1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage:AC 500V.
温度范围: -40° C to+105° C
Temperature Range: -40° C to+105° C

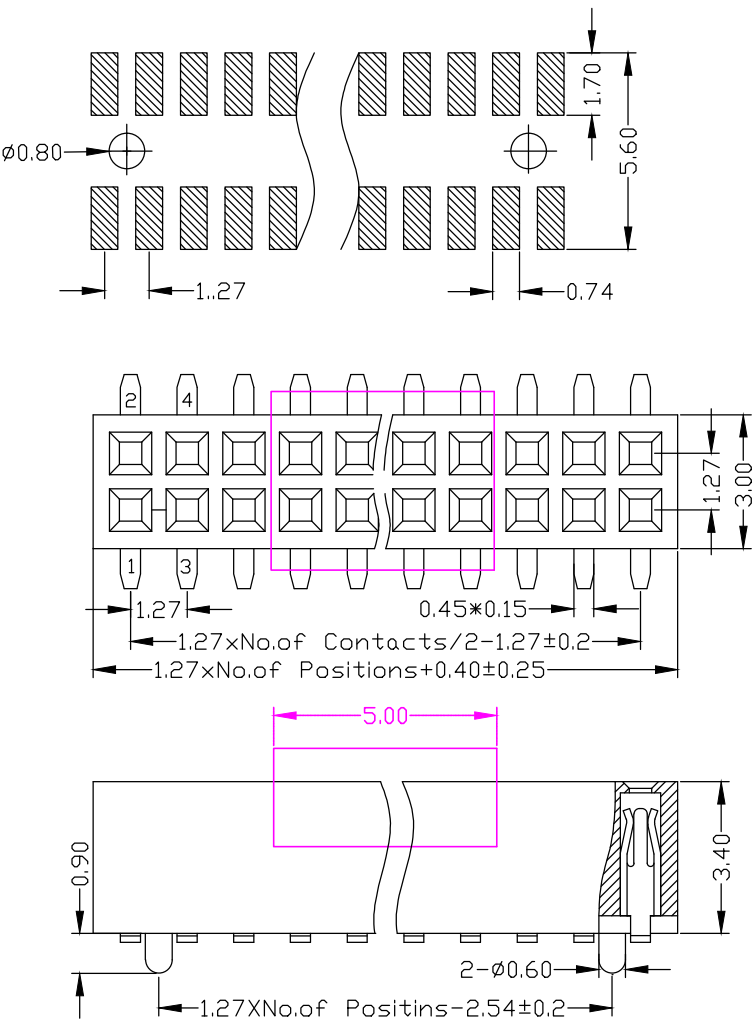

Ordering Information
B0334-12 XX XX X CU X 2

NO. OF PINS PER ROW 2~50P	Contact Plating		INSULATOR	PACKING
	Full Of Gold	Semi-gold	MATERIAL:	A:PE Bag
	G0=0.8u"	L0=0.8u"	1:PBT	B:Tape & Reel
	G1=1u"	L1=1u"	2:PA46	C:Tube
	G2=1.5u"	L2=1.5u"	3:PA66	D:Tube+CAP
	G3=2u"	L3=2u"	4:PA6T	E:Tray
	G4=3u"	L4=3u"	5:PA9T	
	G5=5u"	L5=5u"	6:LCP	
	G6=10u"	L6=10u"	7:	
	G7=15u"	L7=15u"		
	G8=20u"	L8=20u"		
	G9=30u"	L9=30u"		
	T1=Ordinary Tin Plated			
	T2=Matte Tin Plated			
	T3=Tin-plated High-temperature			
	T4=high tempreture Matt tin			

						OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	B0334-12XXXXCUX2	
						X.XXX	±0.10							
						Angle	±3°	SHEET	1/2	CHECK		TITLE:	1.27mm 双排母 塑高3.4 SMT U型 带内柱	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	