

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色:黑色.

Housing:PA6T+30%G. F UL94V-0, Color:Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact:Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current:1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围: -40° C to+105° C



Temperture Range: -40° C to+105° C

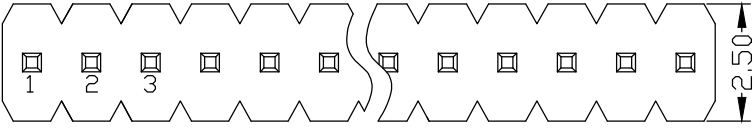

Ordering Information

A03XX-11 XX XX X A XXX X 1

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating		INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm	2~40P	Full Of Gold	Semi-gold	1:PBT		A:PE Bag
17:1.7mm		G0=0.8u"	L0=0.8u"	2:PA46		B:Tape & Reel
20:2.0mm		G1=1u"	L1=1u"	3:PA66		C:Tube
25:2.54mm		G2=1.5u"	L2=1.5u"	4:PA6T		D:Tube+CAP
30:3.0mm		G3=2u"	L3=2u"	5:PA9T		E:Tray
		G4=3u"	L4=3u"	6:LCP		
		G5=5u"	L5=5u"	7:		
		G6=10u"	L6=10u"			
		G7=15u"	L7=15u"			
		G8=20u"	L8=20u"			
		G9=30u"	L9=30u"			
		T1=Ordinary Tin Plated				
		T2=Matte Tin Plated				
		T3=Tin-plated High-temperature				
		T4=high temperture Matt tin				

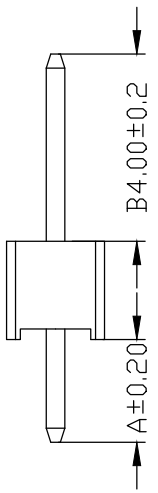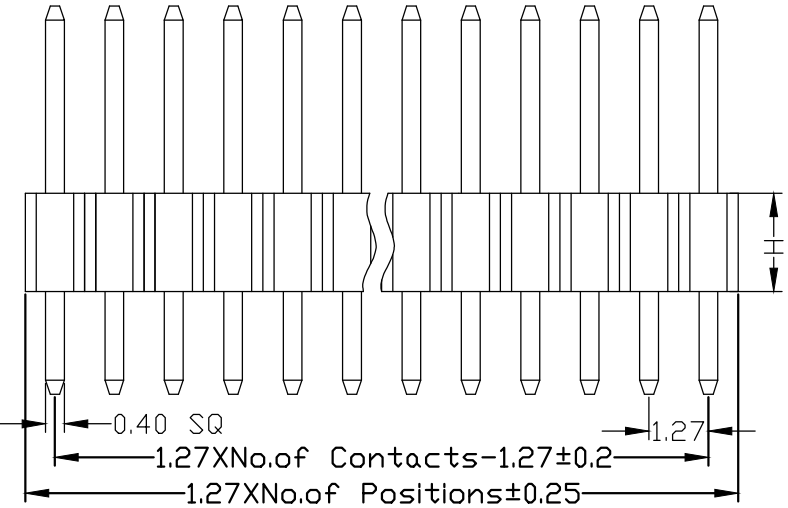

						OPERATION		SCALE		Fit	苏州瀚牧锦电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN		PART NO.	A03XX-11XXXXXAXXX1	
						X.XXX	±0.10							
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27mm 排针 单排 180度 1*XXP	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		