

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40° C to +105° C

Temperature Range: -40° C to +105° C

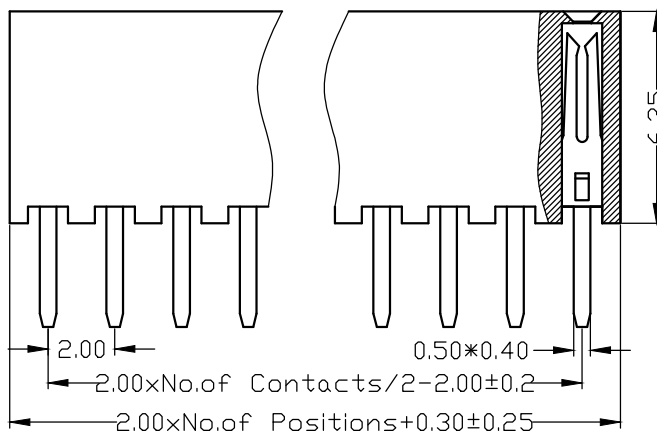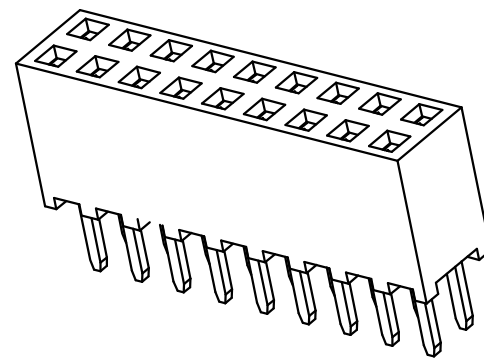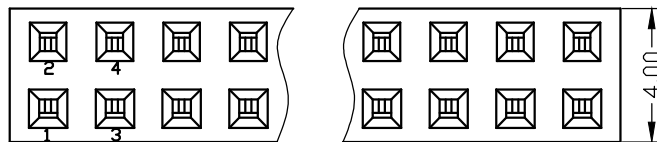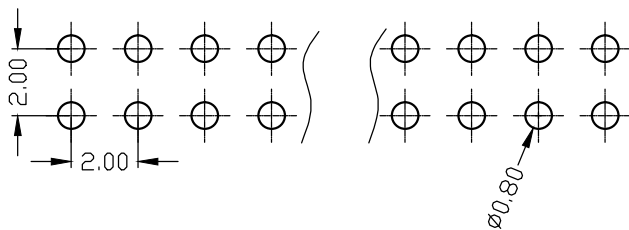

Ordering Information

B0563-12 XX XX X AY X 1

| NO. OF PINS PER ROW | Contact Plating | | INSULATOR MATERIAL: | PACKING |
|---------------------|--------------------------------|-----------|---------------------|----------------|
| 2~50P | Full Of Gold | Semi-gold | A: PE Bag | B: Tape & Reel |
| | G0=0.8u" | L0=0.8U" | 1: PBT | C: Tube |
| | G1=1u" | L1=1U" | 2: PA46 | D: Tube+CAP |
| | G2=1.5u" | L2=1.5U" | 3: PA66 | E: Tray |
| | G3=2u" | L3=2U" | 4: PA6T | |
| | G4=3u" | L4=3U" | 5: PA9T | |
| | G5=5u" | L5=5U" | 6: LCP | |
| | G6=10u" | L6=10U" | 7: | |
| | G7=15u" | L7=15U" | | |
| | G8=20u" | L8=20U" | | |
| | G9=30u" | L9=30U" | | |
| | T1=Ordinary Tin Plated | | | |
| | T2=Matte Tin Plated | | | |
| | T3=Tin-plated High-temperature | | | |
| | T4=high temperature Matt tin | | | |

苏州瀚牧锦电子有限公司

| REV | DATE | MODIFICATION | DESCRIPTION | CHANGE | APPROVE | OPERATION | SCALE | Fit | PART NO. | |
|-----|------|--------------|-------------|--------|---------|-------------|-------|---------|-------------------|--------------------------|
| | | | | | | X.X ±0.25 | UNIT | MM | B0563-12XXXXXAYX1 | |
| | | | | | | X.XX ±0.20 | SIZE | A4 | DESIGN | |
| | | | | | | X.XXX ±0.10 | SHEET | 1/1 | CHECK | |
| | | | | | | Angle ±3° | PROJ. | APPROVE | TITLE: | 2.0mm 双排母 塑高6.35 180度 Y型 |
| | | | | | | | | | Customer No. | |