

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA9T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C



Temperature Range: -40°C to +105°C

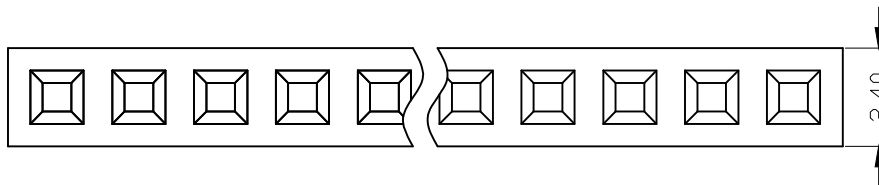

Ordering Information

B05XX-11 XX XX X FU X 1

| NO. OF PINS PER ROW | Contact Plating | | INSULATOR MATERIAL: | PACKING |
|---------------------|--------------------------------|-----------|---------------------|---------------|
| 2~50P | Full Of Gold | Semi-gold | 1:PBT | A:PE Bag |
| | G0=0.8u" | L0=0.8U" | 2:PA46 | B:Tape & Reel |
| | G1=1u" | L1=1U" | 3:PA66 | C:Tube |
| | G2=1.5u" | L2=1.5U" | 4:PA6T | D:Tube+CAP |
| | G3=2u" | L3=2U" | 5:PA9T | E:Tray |
| | G4=3u" | L4=3U" | 6:LCP | |
| | G5=5u" | L5=5U" | 7: | |
| | G6=10u" | L6=10U" | | |
| | G7=15u" | L7=15U" | | |
| | G8=20u" | L8=20U" | | |
| | G9=30u" | L9=30U" | | |
| | T1=Ordinary Tin Plated | | | |
| | T2=Matte Tin Plated | | | |
| | T3=Tin-plated High-temperature | | | |
| | T4=high tempreture Matt tin | | | |

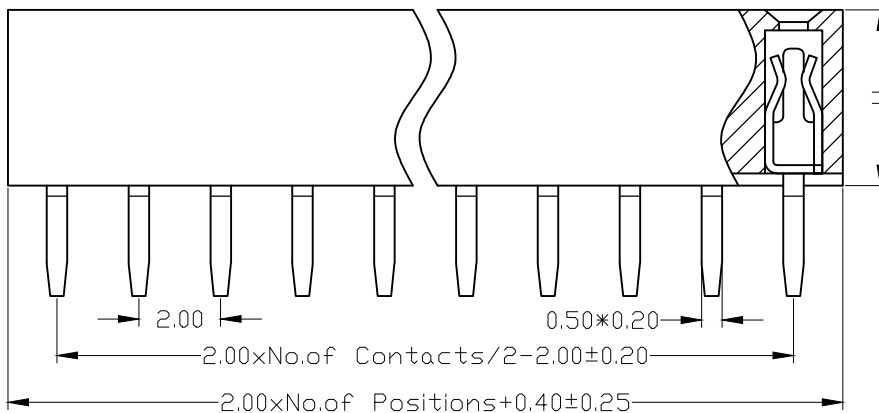

Dimension antitheses list

| ITEM | H | | |
|-----------|-----|-----|-----|
| Standard | 4.0 | 4.3 | 4.6 |
| Alternate | | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | | SCALE | | Fit | | PART NO. | B05XX-11XXXXXFX1 |
|-----|------|--------------------------|--------|---------|-----------|-------|-------|-----|---------|----|--------------|------------------|
| | | | | | DIM | TOL | UNIT | MM | SIZE | A4 | | |
| | | | | | X.X | ±0.25 | | | | | | |
| | | | | | X.XX | ±0.20 | | | | | | |
| | | | | | X.XXX | ±0.10 | | | | | | |
| | | | | | Angle | ±3° | | | | | | |
| | | | | | | | PROJ. | 1/1 | APPROVE | | | |
| | | | | | | | | | | | Customer No. | |

JIANGJI 苏州江基电子科技有限公司
SuZhou JiangJi Electronic Technology CO.LTD

PART NO. B05XX-11XXXXXFX1
TITLE: 2.0排母 单排 180度